

V100 Operation Manual


(June 2008)

TRADEMARKS

All brand and product names are trademarks or registered trademarks of their respective companies.

NOTE

The information in this manual is subject to change without notice.



ENERGY STAR[®] is a government program that offers businesses and consumers energy-efficient solutions, making it easy to save money while protecting the environment for future generations.

Please reference ENERGY STAR[®] related information from **www.energystar.gov**.

As an ENERGY STAR[®] Partner, MiTAC Technology Corporation has determined that this product meets the ENERGY STAR[®] guidelines for energy efficiency.

An ENERGY STAR[®] qualified computer uses 70 % less electricity than computers without enabled power management features.

Earning the ENERGY STAR[®]

- When every home office is powered by equipment that has earned the ENERGY STAR[®], the change will keep over 289 billion pounds of greenhouse gases out of the air.
- If left inactive, ENERGY STAR[®] qualified computers enter a low-power mode and may use 15 watts or less. New chip technologies make power management features more reliable, dependable, and user-friendly than even just a few years ago.
- Spending a large portion of time in low-power mode not only saves energy, but helps equipment run cooler and last longer.
- Businesses that use ENERGY STAR[®] enabled office equipment may realize additional savings on air conditioning and maintenance.

- Over its lifetime, ENERGY STAR® qualified equipment in a single home office (e.g., computer, monitor, printer, and fax) can save enough electricity to light an entire home for more than 4 years.
- Power management (“sleep settings”) on computers and monitors can result in much savings annually.

Remember, saving energy prevents pollution

Because most computer equipment is left on 24 hours a day, power management features are important for saving energy and are an easy way to reduce air pollution. By using less energy, these products help lower consumers’ utility bills, and prevent greenhouse gas emissions.



LEARN MORE AT
energystar.gov

Table of Contents

Preface	vi
Notational Conventions.....	vii
Chapter 1 Getting Started.....	1-1
Getting the Computer Running	1-2
Unpacking	1-2
Connecting to AC Power	1-2
Opening and Closing the Cover	1-4
Operating in Tablet Mode	1-5
Turning On and Off the Computer.....	1-8
Attaching the Hand Strap	1-9
Taking a Look at the Computer.....	1-11
Right-Side Components	1-11
Left-Side Components	1-12
Rear Components	1-13
Front Components.....	1-14
Bottom Components.....	1-15
Top-open Components	1-16
Where to Go from Here.....	1-18
Chapter 2 Operating Your Computer.....	2-1
Starting and Stopping the Computer	2-2
Starting the Computer	2-2
Stopping the Computer	2-2
Using the Internal Keyboard	2-4
Typewriter Keys.....	2-4
Cursor-Control Keys	2-5
Numeric Keypad	2-5

Function Keys	2-6
Fn Key	2-6
Hot Keys	2-6
Using the Software Keyboard	2-9
Using the Touchpad	2-10
Configuring the Touchpad	2-12
Using the Touchscreen (Optional)	2-13
Using the Active Digitizer Feature (Optional)	2-15
Using the Hard Disk Drive	2-18
Using the Video Features	2-19
Configuring the Display Modes	2-20
Toggle Between Landscape and Portrait View	2-20
Using the Audio Features	2-22
Connecting Audio Devices	2-23
Using the Communication Features	2-24
Using the Modem	2-24
Using the LAN	2-25
Using the Wireless LAN	2-26
Using the <i>Bluetooth</i> [®] Wireless Feature (Optional)	2-31
Using the GPS (Optional)	2-34

Chapter 3 Managing Power3-1

AC Adapter	3-2
Battery Pack	3-3
Charging the Battery Pack	3-3
Battery Automatic Calibration Utility	3-4
Checking the Battery Level	3-6
Replacing the Battery Pack	3-7
Battery Low Signals and Actions	3-9
Power Management	3-10
Hibernation	3-11
Power-Saving Tips	3-12

Chapter 4 Expanding Your Computer4-1

Connecting an External Monitor (Optional)	4-2
---	-----

	Connecting a Serial Device	4-3
	Connecting a USB Device.....	4-4
	Using PC Cards	4-5
	Inserting and Removing a PC Card.....	4-5
	Using the Card Reader	4-7
	Using the Port Replicator (Optional).....	4-9
	System Memory Upgrade.....	4-11
Chapter 5	Using BIOS Setup	5-1
	When and How to Use BIOS Setup	5-2
	When to Use.....	5-2
	Starting BIOS Setup.....	5-2
	Moving Around and Making Selections	5-4
	Main Menu	5-5
	Advanced Menu	5-6
	Security Menu	5-7
	Boot Menu.....	5-9
	Exit Menu.....	5-10
	When and How to Use the System Recovery Feature.....	5-11
	When to Use.....	5-11
	Starting System Recovery	5-11
Chapter 6	Installing Software Drivers.....	6-1
	How to Use the Driver Disc	6-2
	Touchscreen Utility.....	6-12
	GPS Driver.....	6-18
	Module SW Utility.....	6-20
	MTCCTRL Utility	6-23
	Using the OSD	6-32
	SATA AHCI Driver	6-34
Chapter 7	Caring for the Computer	7-1
	Protecting the Computer.....	7-2
	Using the Cable Lock.....	7-2
	Using an Anti-Virus Strategy.....	7-3

Taking Care of the Computer	7-4
Location Guidelines	7-4
General Guidelines	7-4
Cleaning Guidelines	7-5
Battery Pack Guidelines	7-5
When Traveling	7-6

Chapter 8 Troubleshooting.....8-1

Preliminary Checklist	8-2
Solving Common Problems	8-3
Battery Problems	8-4
Bluetooth Problems	8-4
Display Problems	8-5
Hardware Device Problems	8-6
Hard Disk Drive Problems	8-6
Keyboard, Mouse, and Touchpad Problems	8-7
LAN Problems	8-7
WLAN Problems	8-8
Modem Problems	8-9
PC Card Problems	8-10
Power Management Problems	8-10
Software Problems	8-11
Sound Problems	8-11
Startup Problems	8-12
Other Problems	8-12
Resetting the Computer	8-13

Appendix A Specifications A-1

Appendix B Regulatory Information B-1

On the Use of the System	B-2
Class B Regulations	B-2
Safety Notices	B-3
On the Use of the RF Device	B-6
USA and Canada Safety Requirements and Notices	B-6

Preface

This manual contains information that will help you operate the computer. It is divided into 8 chapters and 2 appendices.

- Chapter 1, **Getting Started**, takes you through the process of setting up the computer and identifying its external components.
- Chapter 2, **Operating Your Computer**, tells you how to use the computer's components and features.
- Chapter 3, **Managing Power**, provides information on power.
- Chapter 4, **Expanding Your Computer**, provides information on installing and using peripheral devices.
- Chapter 5, **Using BIOS Setup**, describes the BIOS Setup program that configures the computer's BIOS settings.
- Chapter 6, **Installing Software Drivers**, describes how to install the drivers and utilities supplied with the computer.
- Chapter 7, **Caring for the Computer**, gives you tips in care and maintenance.
- Chapter 8, **Troubleshooting**, gives solutions to common problems you may encounter when using the computer.
- Appendix A, **Specifications**, gives a brief specification of the computer.
- Appendix B, **Regulatory Information**, provides regulatory statements and safety notices on your computer.

Notational Conventions

Throughout this manual, the following conventions are used to distinguish elements of text.

| NOTE: identifies additional information that requires special attention.

| CAUTION: identifies important information that, if not followed, may result in loss of data or damage to the computer.

Keyboard keys are shown in a bold typeset. For example:

Press the **Enter** key to complete.

When keys are joined by a plus sign (+), press the first key, and, while keeping the first key down, press the remaining keys, finally release all the keys. When necessary, keys are also shown in graphics.

A title, command, setup item, or button that you can see on the screen is shown in boldface. A value or an option that you can select for a setup item is shown in italic. For example:

Select **Power Schemes**, set it to *Portable/Laptop*, and then click the **OK** button.

Getting Started

Congratulations on purchasing this ruggedized computer.

This chapter first tells you step by step how to get the computer up and running. You will find instructions for these procedures:

- Unpacking
- Connecting to AC power
- Opening and closing the cover
- Turning on the computer
- Turning off the computer
- Attaching the grid-type hand strap

Then, you will find a section briefly introducing the external components of the computer. And the last section navigates you to the information you may need after the computer is ready for use.

Getting the Computer Running

This section guides you through the procedures for getting the computer ready for operation.

Unpacking

After unpacking the shipping carton, you should find these standard items:

- Notebook computer
- Accessories:
 - AC adapter
 - AC power cord
 - Grid-type hand strap
 - Driver disc
 - Touchscreen pen (option)
 - Digitizer pen (option)
 - Size “AAAA” battery (option)

Inspect all the items. If any item is damaged or missing, notify your dealer immediately.

Keep the shipping carton and packing materials in case you need to ship or store the computer in the future.


Connecting to AC Power

The computer operates either on the external AC power or internal battery power. It is suggested that you use AC power when you start up the computer for the very first time.

CAUTION: Use only the AC adapter included with your computer. Using other AC adapters may damage the computer.

1. Make sure that the computer is turned off.

2. Plug the DC cord of the AC adapter to the power connector of the computer (❶).
3. Plug the female end of the AC power cord to the AC adapter and the male end to an electrical outlet (❷).

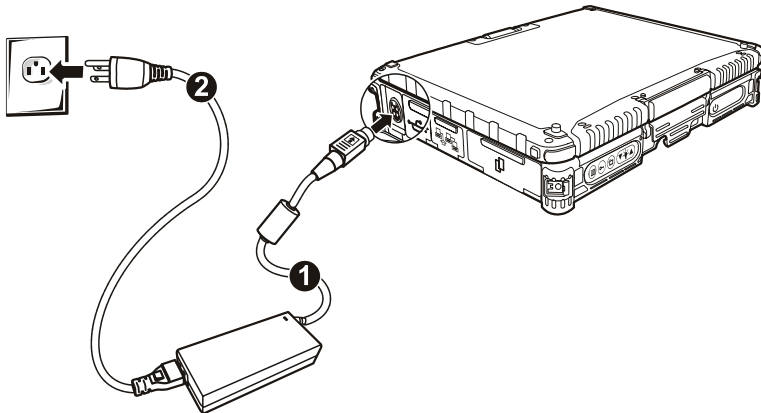

4. When the AC adapter is connected, power is being supplied from the electrical outlet to the AC adapter and onto your computer. Now, you are ready to turn on the computer.


CAUTION:

- When you disconnect the AC adapter, disconnect from the electrical outlet first and then from the computer. A reverse procedure may damage the AC adapter or the computer.
- When unplugging the connector, always hold the plug head. Never pull on the cord.


NOTE: When the AC adapter is connected, it also charges the battery pack. For information on using battery power, see Chapter 3.

Opening and Closing the Cover

Open the top cover by pulling up on latch A and releasing latch B (❶) and lifting up the cover (❷). You can tilt the cover forward or backward for optimal viewing clarity.

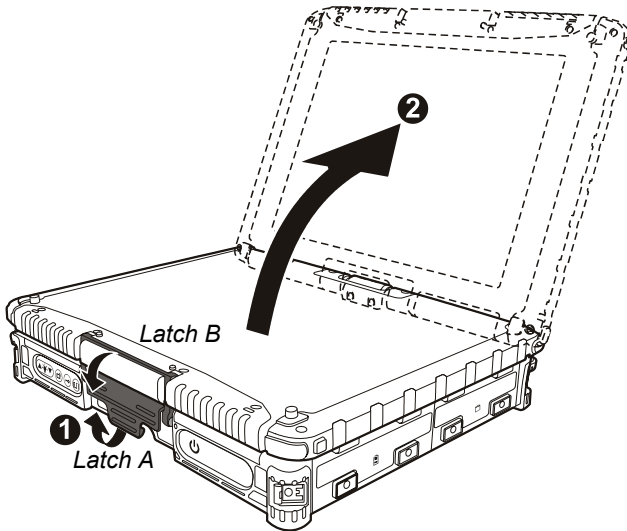

Close the top cover by closing the display (❶). Then position latch B on the display side and bring latch A down (❷) to fix the display in place.

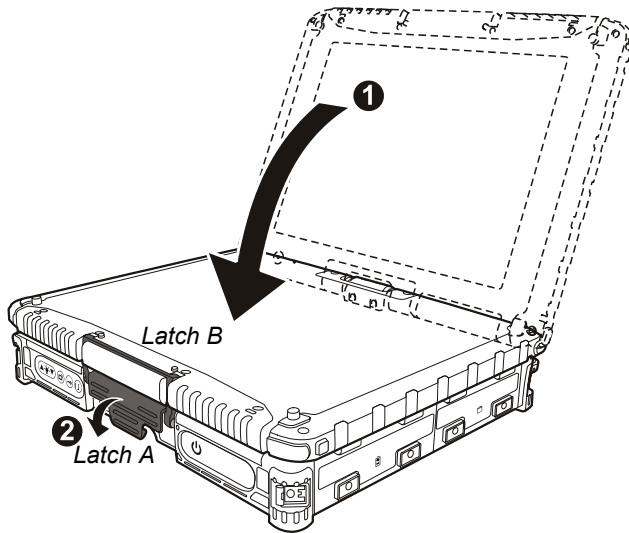


Operating in Tablet Mode

In addition to being used as a regular notebook computer (Laptop mode), your computer can also be operated in Tablet mode. In Tablet mode, the computer can be operated using the touchscreen or active digitizer feature with the software keyboard (see chapter 2), and the tablet buttons (see later section on “Front Components”), instead of the internal keyboard and the touchpad.

1. Open the top cover so that it is almost perpendicular with the keyboard of the computer.


2. Turn the display counter-clockwise by 180°.

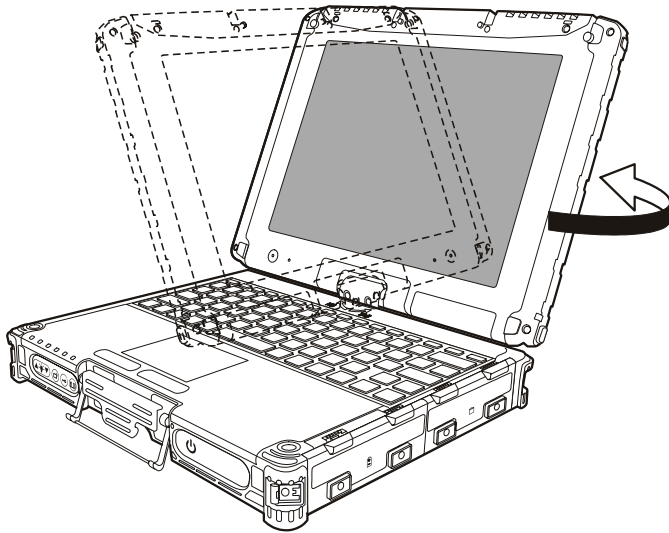


CAUTION: Do not rotate the display more than 180°, or attempt to rotate the display clockwise.

3. Close the computer with the display facing up (❶). Then pull up on the latch A.

4. Position the latch B on the display side, then bring latch A down (②) to fix the display in place.

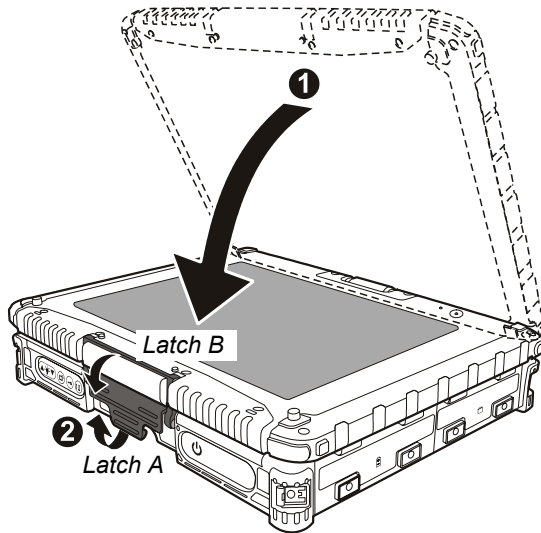

In Tablet mode, the computer can be operated while holding it as shown.

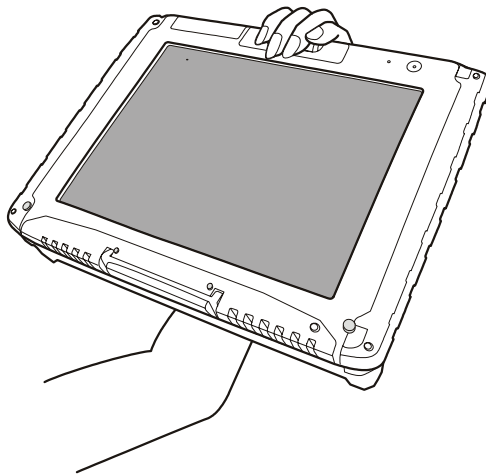


To return to Laptop mode, perform the steps for changing the computer into Tablet mode in reverse order.

Turning On and Off the Computer

Turning On

1. Make sure that the computer is connected to AC power.
2. Press the power button (⏻).

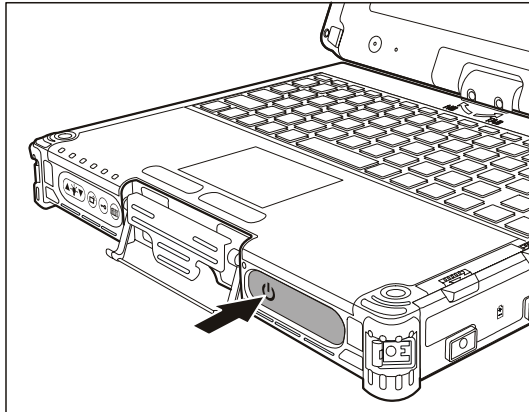

3. Each time the computer is turned on, it performs a Power-On Self Test (POST), and the operating system such as Windows should start.

Turning Off

To turn off the computer power, use the “Shut Down” command of your operating system.


NOTE: There are other ways you can stop the computer so that you will be back to where you left off when you next turn on the computer. (See “Stopping the Computer” in Chapter 2 for information.)

CAUTION: If you have to turn the computer on again immediately after turning it off, wait for at least five seconds. Turning the computer off and on rapidly can damage it.


Attaching the Hand Strap

The hand strap can be attached to any two sides of the four (option) corners of your computer.


Standard setup: two buckles on the left/right front side of your computer.

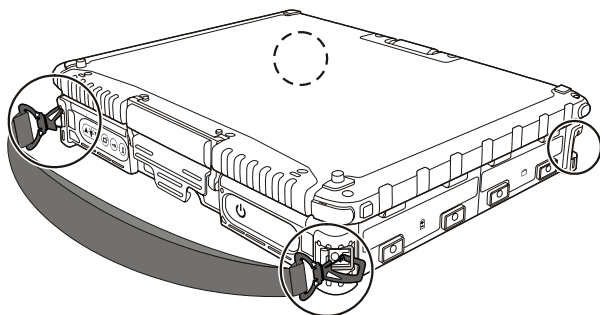

To release, press on the right spring latch first to detach the right side. Then release the left side.

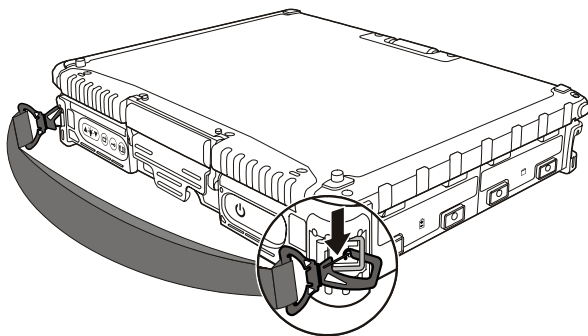

Optional setup: buckles on four corners of your computer.

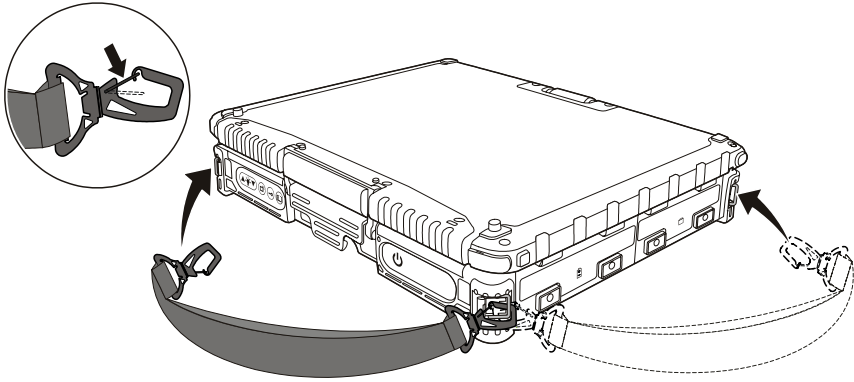

CAUTION:


- The strap has been designed to carry only the weight of the computer. Therefore, be sure that the strap does not carry a weight that exceeds the weight of the computer. The strap may accidentally come loose from the computer.
- Do not use a strap that is damaged or about to tear.



Taking a Look at the Computer

This section identifies the external components of the computer and briefly describes the function of each component.


NOTE: Depending on the model you purchased, the appearance of your computer may not be exactly the same as those shown in this manual.

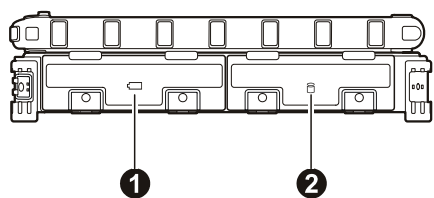





Right-Side Components

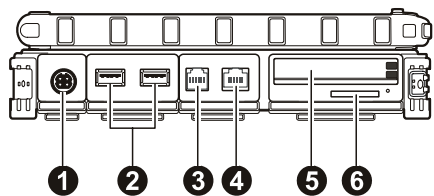


Ref	Component	Description
1	Battery Pack Compartment 	Inside is the battery pack that supplies power to your computer when external power is not connected.
2	Hard Disk Drive Compartment 	Inside is the hard disk drive.





Left-Side Components




Ref	Component	Description
❶	Power Connector 	Connects the AC adapter.
❷	USB Ports 	Each of the two ports connects a USB device, such as a flash disk, printer, digital camera, joystick, and more.
❸	RJ-11 Connector 	Connects the telephone line.
❹	RJ-45 Connector 	Connects the LAN cable.
❺	PCMCIA Slots 	Each of the two slots accepts a PC card for additional functions.
❻	Card Reader 	Accepts a SD (Secure Digital) card for removable storage media.

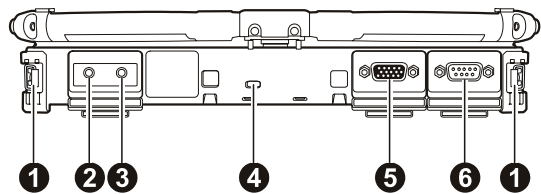




Rear Components

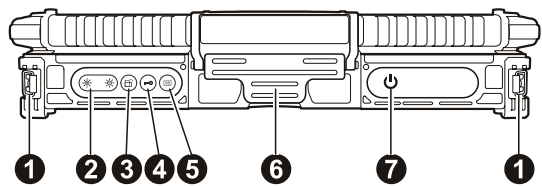


Ref	Component	Description
❶	Hand Strap Holder	The hand strap can be attached to the two holders for convenient handling of your computer.
❷	Audio Output Connector 	Connects a set of headphones, external speakers with amplifier, or an audio recording device.
❸	Microphone Connector 	Connects an external microphone.
❹	Kensington Lock	Locks the computer to a stationary object for security.
❺	VGA Connector 	Connects an external display monitor. NOTE: Depending on your model, this port could be a serial connector.
❻	Serial Connector 	Connects a serial mouse or serial communication device.

Front Components




Ref	Component	Description
❶	Hand Strap Holder	The hand strap can be attached to the two holders for convenient handling of your computer.
❷	LCD Brightness Buttons 	Adjust the LCD brightness level.
❸	LCD Rotate Button 	Rotates the LCD display orientation from default landscape to portrait and vice versa.
❹	Security Button 	Serves as the Ctrl+Alt+Del keyboard buttons.
❺	Software Keyboard Button 	Shows or hides the software keyboard on your LCD display.
❻	Top Cover Latch	Locks the top cover.
❼	Power Button 	Turns the computer power ON and OFF.


Bottom Components

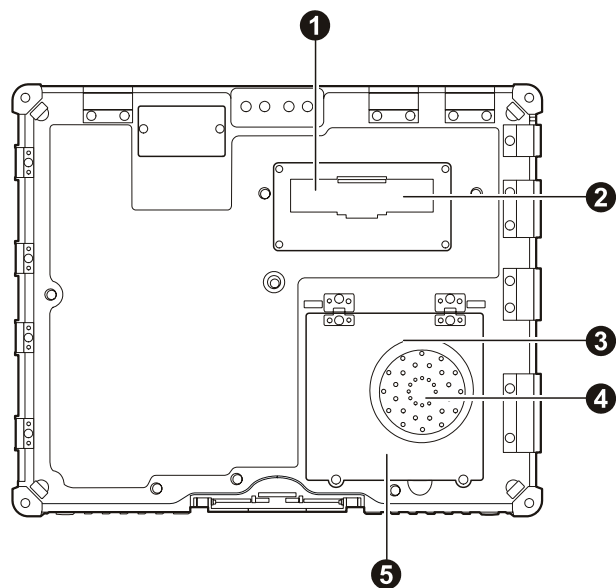





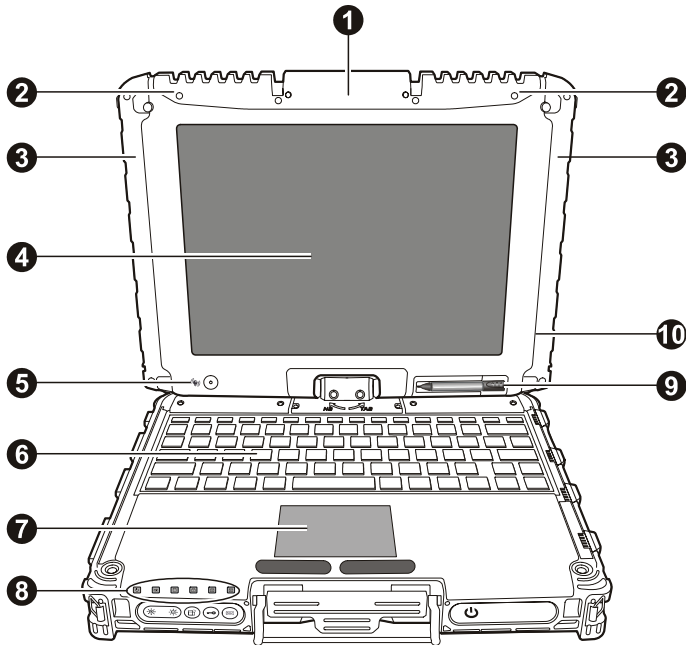

Ref	Component	Description
❶	Antenna Connector	Inside is the connector for using an external antenna.
❷	Expansion Bus Connector	Inside is the expansion bus connector for using a Port Replicator.
❸	Wireless LAN (WLAN) Card Slot	Inside is the mini PCI-E slot for using a mini PCI-E WLAN card.
❹	Speaker	Sends out sound and voice from your computer.
❺	Memory Slot	Inside is the memory slot for expanding the memory size of your computer.

Top-open Components



Ref	Component	Description
①	CMOS Camera / GPS Module (option)	Allows you to use your computer's optional camera / GPS function.
②	WLAN Antenna	Inside is the antenna for wireless LAN (local area network) transmission.
③	WWAN 3G Antenna (option)	Inside is the antenna for optional wireless WAN (wide area network) 3G transmission.
④	LCD Screen	Displays the output of the computer.
⑤	Light Sensor 	Adjusts the LCD brightness and optional keyboard backlight automatically surrounding.
⑥	Keyboard	Serves as the data input device of the computer.

Ref	Component	Description
7	Touchpad	Serves as the pointing device of the computer.
8	Indicators	Show the current status of the computer's devices.
		AC Power indicator
		Lights green when the computer is turned on and using AC power.
		Battery Charge indicator
		Lights green when the battery is fully charged.
		Lights yellow when the battery is being charged.
		Blinks yellow when the battery's capacity is below 10 %.
		Blinks green when battery's temperature is too high (over 60 °C).
		Hard disk drive in-use indicator
		Lights green when computer is accessing the hard disk drive.
		Lights red when optional hard disk drive heater is on for low temperature operation.
		Scroll Lock indicator
		Num Lock indicator
		Caps Lock indicator
9	Touchscreen Pen (option)	Provides a convenient way to use the touchscreen. Can be stretched for better grip and handling.
10	Bluetooth Antenna (option)	Inside is the antenna for optional Bluetooth feature transmission.

Where to Go from Here

As your computer is ready for operation, you may want to do any of the following now:

For this purpose...	Do this...
To know more about the computer...	Go on to the next chapter.
To install the operating system if your dealer has not already done so...	See the operating system manual.
To know more about the operating system...	Read the operating system manual.
To install the drivers if your dealer has not already done so...	See Chapter 6.
To charge the battery pack for the first time...	See “Charging the Battery Pack” in Chapter 3.

Operating Your Computer

This chapter provides information about the use of the computer.

If you are new to computers, reading this chapter will help you learn the operating basics. If you are already a computer user but are new to notebook computers, you may choose to read only the parts containing information unique to your computer.

Described in this chapter are the operating basics of these components:

- Keyboard
- Touchpad
- Touchscreen (option)
- Active Digitizer (option)
- Hard disk drive

And these features:

- Starting and stopping the computer
- Video features
- Audio features
- Communication features

Starting and Stopping the Computer

There are a number of ways to start and stop the computer.

Starting the Computer

You always start the computer using the power button.

A computer starts up with an operating system (OS) existing on the storage device such as the hard disk. The computer will automatically load the OS after you turn it on. This process is called booting.

NOTE: An operating system is the platform for all your software application programs to run on. Your computer uses the Microsoft Windows XP operating system.

Stopping the Computer

When you finish a working session, you can stop the computer by turning off the power or leaving the computer in Standby or Hibernation mode:

To stop in this mode...	Do this...	To start up or resume again
Off	<p>Follow the shutdown procedure of your operating system. This can prevent loss of unsaved data or damage to your software programs.</p> <p>If the system is locked up because of hardware or software problems, press the power button to turn off the computer.</p>	Press the power button.
Standby	<p>Depending on your settings in Windows, you can place the computer in Standby mode by:</p> <ul style="list-style-type: none">• Closing the display cover• Pressing the Fn+F10 hot key• Pressing the power button	Press any key.

To stop in this mode...	Do this...	To start up or resume again
Hibernation	<p>Depending on your settings in Windows, you can place the computer in Hibernation mode by:</p> <ul style="list-style-type: none"> • Closing the display cover • Pressing the Fn+F10 hot key • Pressing the power button 	Press the power button.

If you choose to stop in Standby or Hibernation mode, you can return to where you left off the next time you start up the computer. (See “Power Management” in Chapter 3 for more information.)

Using the Internal Keyboard

Your keyboard has all the standard functions of a full-sized computer keyboard plus a **Fn** key added for specific functions.

The standard functions of the keyboard can be further divided into four major categories:


- Typewriter keys
- Cursor-control keys
- Numeric keys
- Function keys

Typewriter Keys

Typewriter keys are similar to the keys on a typewriter. Several keys are added such as the **Ctrl**, **Alt**, **Esc**, and lock keys for special purposes. When the lock keys (**Caps Lock**, **Num Lk**, and **Scroll Lk**) are pressed, their corresponding indicators light up.

The Control (**Ctrl**) / Alternate (**Alt**) key is normally used in combination with other keys for program-specific functions. The Escape (**Esc**) key is usually used for stopping a process. Examples are exiting a program and canceling a command. The function depends on the program you are using.


Cursor-Control Keys



NOTE: The word “cursor” refers to the indicator on the screen that lets you know exactly where on your screen anything you type will appear. It can take the form of a vertical or horizontal line, a block, or one of many other shapes.

Numeric Keypad

A 15-key numeric keypad is embedded in the typewriter keys as shown next:

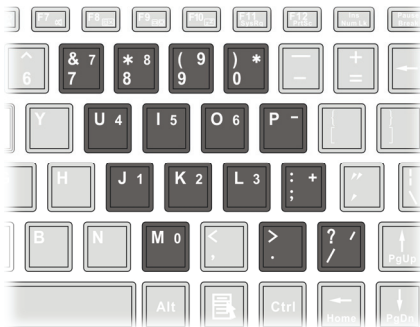

Numeric keys facilitate entering of numbers and calculations. When Num Lock is on, the numeric keys are activated; meaning you can use these keys to enter numerals.

NOTE:

- When the numeric keypad is activated and you need to type the English letter in the keypad area, you can turn Num Lock off or you can press **Fn** and then the letter without turning Num Lock off.
- Some software may not be able to use the numeric keypad on the computer. If so, use the numeric keypad on an external keyboard instead.

Function Keys

On the top row of the keys are the function keys: **F1** to **F12**. Function keys are multi-purpose keys that perform functions defined by individual programs.











F_n Key

The **F_n** key, at the lower left corner of the keyboard, is used with another key to perform the alternative function of a key. The letter “F_n” and the alternative functions are identified by the color of blue on the keytop. To perform a desired function, first press and hold **F_n**, then press the other key.

Hot Keys

Hot keys refer to a combination of keys that can be pressed any time to activate special functions of the computer. Most hot keys operate in a cyclic way. Each time a hot key combination is pressed, it shifts the corresponding function to the other or next choice.

You can easily identify the hot keys with the icons imprinted on the keytop. The hot keys are described next.

Key	Description
	Switches the keyboard backlight on and off (optional).
	Switches the wireless LAN radio on and off. NOTE: This function works only if an optional mini PCI-E wireless LAN card is installed.
	Decreases the sound volume.
	Increases the sound volume.
	Decreases the LCD backlight. NOTE: 20 backlight levels are provided from 0 to 20. The LCD backlight off is level 0 and the maximum LCD backlight is level 20. According to the ambient light, the light sensor can automatically adjust the original LCD backlight value from 70 % to 150 %. But LCD backlight level 0 and level 1 cannot be adjusted by the light sensor.
	Increases the LCD backlight (see also “ NOTE ” on Fn + F5).
	Switches the system sound output off (mute) and on.
	Switches LCD on and off, or switch the sunlight-readable mode on and off (see chapter 6 Fn+F8 Key Setup under MTCCCTRL Utility for more details). IMPORTANT: <u>To prevent burns to your fingers if using the computer (especially in Tablet Mode) with sunlight-readable mode turned on, do wear gloves when touching the top portion of the LCD display as it may be hot to the touch.</u>
	Switches the display output when external devices are connected. NOTE: This function only applies to Plug & Play display devices.
	Serves as the sleep button that you can define with Windows’ Power Options . (See the “Power Management” in Chapter 3.)

Euro Symbol


You can press the euro dollar sign € on various keyboards.

- To press the euro sign on a United States-International keyboard, hold down the **Alt Gr** key and press **5** (which has an euro sign on it).
- To press the euro sign on a standard United States keyboard, hold down either of the **Alt** keys and type **0128** on the numeric keypad part of your keyboard.
- To press the euro sign on an UK keyboard, hold down the **Alt Gr** key and press **4** (which has an euro sign on it).



Windows Keys

The keyboard has two keys that perform Windows-specific functions:



Windows Logo key and  Application key.




The  Windows Logo key opens the **Start** menu and performs software-specific functions when used in combination with other keys. The  Application key usually has the same effect as a right mouse click. (See your Windows manual for more information.)

Using the Software Keyboard

NOTE: Make sure to install the MTCAPP driver before using the software keyboard feature (see chapter 6 for details).

When using the computer in Tablet mode, you can use the software keyboard.

1. Press the software keyboard button () and the software keyboard will appear onscreen.



2. Enter the characters with the touchscreen pen as communicate (option).


NOTE: To protect the LCD display, use the optional touchscreen pen on your touchscreen.

Using the Touchpad

CAUTION: Do not use a sharp object such as a pen on the touchpad. Doing so may damage the touchpad surface.

NOTE: For optimal performance of the touchpad, keep your fingers and the pads clean and dry. When tapping on the pad, tap lightly. Do not use excessive force.

The touchpad is a pointing device that allows you to communicate with the computer by controlling the location of the pointer on the screen and making selection with the buttons.

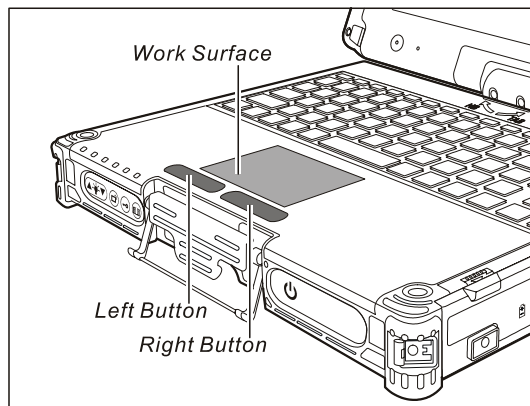

The touchpad consists of a rectangular pad (work surface) and a left and right buttons. To use the touchpad, place your forefinger or thumb on the pad. The rectangular pad acts like a miniature duplicate of your display. As you slide your fingertip across the pad, the pointer (also called cursor) on the screen moves accordingly. When your finger reaches the edge of the pad, simply relocate yourself by lifting the finger and placing it on the other side of the pad.

Here are some common terms that you should know when using the touchpad:

Term	Action
Point	Move your finger on the pad until the cursor points to the selection on the screen.
Click	Press and release the left button. —or— Tap gently anywhere on the pad.
Double-click	Press and release the left button twice in quick succession. —or— Tap twice on the pad rapidly.
Drag and drop	Press and hold the left button, then move your finger until you reach your destination (drag). Finally, release the button (drop) when you finish dragging your selection to the destination. The object will drop into the new location. —or— Gently tap twice on the pad and on the second tap, keep your finger in contact with the pad. Then, move your finger across the pad to drag the selected object to your destination. When you lift your finger from the pad, the selected object will drop into place.
Scroll	To scroll is to move up and down or left and right in the working area on the screen. To move vertically, place your finger on the right or left edge of the pad and slide your finger up and down along the edge. To move horizontally, place your finger on the top or bottom edge of the pad and slide your finger left and right. This function works only after you install the touchpad driver supplied with the computer and it may not work for all applications.

TABLE NOTE: If you swap the left and right buttons, “tapping” on the touchpad as an alternative method of pressing the left button will no longer be valid.

Configuring the Touchpad

You may want to configure the touchpad to suit your needs. For example, if you are a left-handed user, you can swap the two buttons so that you can use the right button as the left button and vice versa. You can also change the size of the on-screen pointer, the speed of the pointer, and so on.

To configure the touchpad, you can use the standard Microsoft driver if you are using Windows.


Using the Touchscreen (Optional)

NOTE:

- Your computer comes with either the touchscreen function or the Active Digitizer feature.
- Make sure the touchscreen driver has been installed properly (see chapter 6 for details).

CAUTION: Do not use a sharp object such as a ballpoint pen or pencil on the touchscreen. Doing so may damage the touchscreen surface. Use your finger or the included touchscreen pen (option).

The touchscreen is a touch-sensitive device that allows you to easily use the computer without a mouse or touchpad to communicate with the computer by controlling the location of the pointer on the screen and making selection with the buttons.

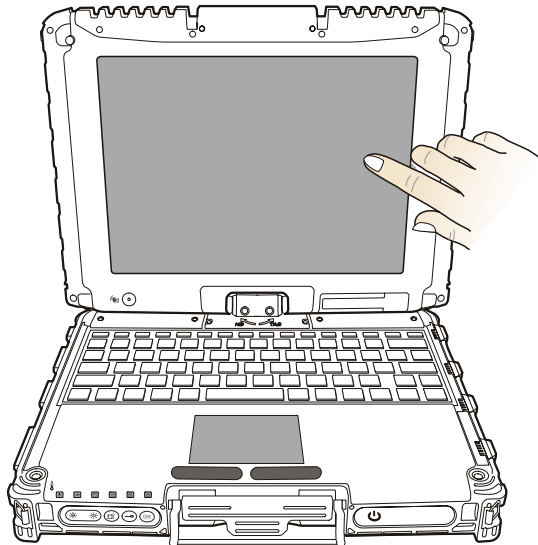

Here are some common terms that you should know when using the touchscreen:

Term	Action
Click/Point	Tap gently on the touchscreen.
Double-click	Tap twice on the touchscreen rapidly.
Drag and drop	Press lightly on the touchscreen and move your finger until you reach your destination (drag). Finally, release your finger (drop) when you finish dragging your selection to the destination. The object will drop into the new location.


Using the Active Digitizer Feature (Optional)

NOTE:

- Your computer comes with either the Active Digitizer feature or the touchscreen function.
- Make sure the digitizer driver has been installed properly (see chapter 6 for details).

CAUTION: Do not use a sharp object such as a ballpoint pen or pencil on the LCD display. Doing so may damage the display surface. Use your included digitizer pen (option).






The active digitizer feature allows you to easily use the computer without a mouse, keyboard, or touchpad to communicate with the computer by using the optional digitizer pen.

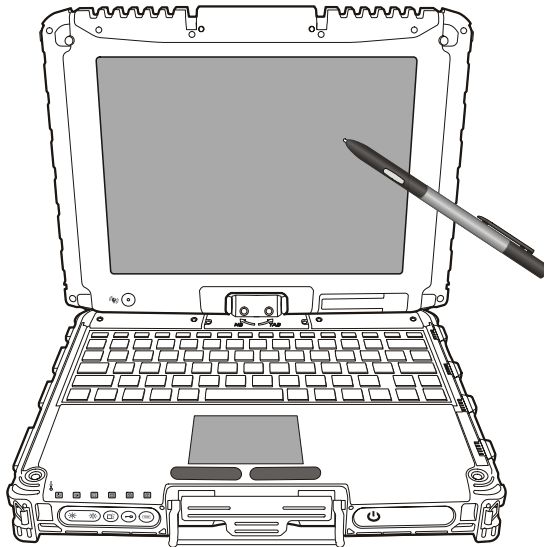

When using the digitizer pen, be sure to install the included size “AAAA” battery.



Here are some common terms that you should know when using the active digitizer feature:

Term		Action
Move		Move the cursor pointed by the digitizer pen.
Click/Point		Tap gently on the display.
Double-click		Tap twice on the display rapidly.
Drag and drop		Press lightly on the display and move your digitizer pen until you reach your destination (drag). Finally, release your digitizer pen (drop) when you finish dragging your selection to the destination. The object will drop into the new location.
Right-click		Press and hold down the digitizer pen button (A), then tap gently the object.

CAUTION:

- When the LCD display is used alone or with an external display simultaneously, the digitizer function cannot be used when the area of either display is set larger than the default setting of the display resolution.
- Even when only an external display is in use, the cursor will move on the external display if you touch the surface of the LCD display with the pen or bring the pen close to the surface of the LCD display when the digitizer driver is active. Therefore, do not touch the LCD display when only an external display is in use.
- The active digitizer feature cannot be used in the BIOS Setup program or when using the full screen in DOS mode.

NOTE:

- You can move the cursor by bringing the digitizer pen close to the screen, without actually touching the screen's surface.
- Do not move the digitizer pen too quickly. If the pen moves too quickly, the cursor may be unable to follow its movement.
- If you cannot click on the edge of the screen, hold the digitizer pen perpendicular to the display and try clicking again.

Using the Hard Disk Drive

WARNING: DO NOT replace the hard disk drive by yourself. Refer all servicing to qualified personnel or your dealer.

Your computer comes with a removable hard disk drive as drive C. A hard disk drive is a storage device with non-removable, rotating, magnetic storage platters inside it. It is where your operating system and application software programs are stored.

Your hard disk drive is a 2.5-inch SATA (serial ATA) hard disk drive. This type of drive embodies the latest in fast, reliable mass storage by integrating all the control circuitry necessary for operation directly onto the drive itself.

You can enable the Advanced Host Controller Interface (AHCI), a programming interface for SATA host controllers. AHCI defines transactions between the SATA controller and software and enables advanced performance and usability with SATA. When the SATA AHCI mode is enabled (see chapter 5 under the Advanced Menu “SATA AHCI Configuration” item), your system can support SATA native command queuing, aggressive power management, and so on.

NOTE: To use the AHCI feature, the AHCI driver supplied with your computer must be installed (see chapter 6 for details).

The system may come with an optional heater that automatically turns on for low temperature operation.





NOTE: To use the HDD heater feature, the MTCCTRL driver supplied with your computer must be installed (see chapter 6 for details).

CAUTION:

- Make regular backups of your data files from your hard disk drive to USB flash disks or other storage media.
- Never turn off or reset the computer while the hard disk drive in-use indicator is on.

Using the Video Features

The video subsystem of your computer features:

- 10.4-inch wide TFT (Thin-Film Transistor) color LCD display with 1024×768 XGA resolution or 12.1-inch wide TFT (Thin-Film Transistor) color LCD display with 1280×800 WXGA resolution
- Simultaneous display on LCD and external monitor, which is useful when you have a presentation as you can control the screen from your computer and face the audience at the same time (option)
- Multi-display capability, which allows you to expand your desktop on the screen to another display device so that you have more desktop space to work on
- Toggle display between landscape view and portrait view using the LCD rotate button 
- Built-in light sensor () to automatically adjust the LCD brightness and optional keyboard backlight
- Manually adjust the display brightness using the LCD brightness up () and down () buttons
- Power Management
- Sunlight-readable LCD display (option)

NOTE:

- Before using the multi-display capability or taking advantage of the enhanced video capabilities, the device driver supplied with your computer must be installed. (See chapter 6 for details.)
- The computer enters the Standby or Hibernation mode when the LCD is closed. If you want to use the computer with the LCD closed, set *Do Nothing* to the “When I close the lid of my portable computer” option in the **Power Options** Properties. Thus the computer does not enter the Standby or Hibernation mode when the LCD is closed.

Configuring the Display Modes

NOTE: When using an external CRT monitor, the resolution depends on the CRT monitor’s supported resolution.


Your computer has been set to a default resolution and number of colors before shipment. You can view and change display settings through your operating system. See your operating system documentation or online help for specific information.

For displaying in higher resolutions, you can connect an external monitor that supports higher resolutions. (See “Connecting an External Monitor” in Chapter 4 for more information.)





Toggle Between Landscape and Portrait View

NOTE: Make sure to install the MTCAPP driver before you can toggle between landscape and portrait view (see chapter 6 for details).

After Windows is started up, you can rotate the display and perform the touchscreen and active digitizer operations in the rotated mode.






To rotate the display, press the LCD rotate button () located on the front of your computer. Each time this button is pressed, the screen display rotates counter-clockwise by 90°.

Model With 3G Module

			
Primary Landscape	Primary Portrait	Secondary Landscape	Primary Landscape

NOTE: Due to SAR of FCC, a minimum distance of 20 cm must be maintained between the human body and the 3G antenna located on both sides of the LCD display.

Model Without 3G Module

				
Primary Landscape	Primary Portrait	Secondary Landscape	Secondary Portrait	Primary Landscape

NOTE:

- If the screen display resolution has been set to 800×600 pixels, you can rotate the display to Primary Landscape and Secondary Landscape only.
- While the display is rotated:
 - Do not set the display resolution larger than the resolution of the LCD display.
 - If you exit Windows, the next time Windows is started up, the operation of the touchpad will not match the display angle for a few seconds.
 - The computer's performance will decrease somewhat.
 - If a video is played, the picture may not be displayed properly or the sound may be broken up. This problem can be corrected by rotating the display to Primary Landscape.
 - The touchpad's scroll function do not work.
- The display cannot be rotated when DOS mode is set to "Full Screen."

Using the Audio Features

NOTE:

- To take advantage of the enhanced audio capabilities, the device driver supplied with your computer must be installed. (See chapter 6 for details.)
- If you experience interference while recording, try lowering the microphone recording volume.


The audio subsystem of your computer features:

- Built-in sound system for recording and playing sound on your computer
- Azalia interface (high density audio codec)
- Speaker (located on bottom side)
- External audio connectors, and
- Built-in microphone (located on the palm rest)



Ways of playing and recording sound vary with the operating system used. See your operating system documentation or online help for specific information.

Connecting Audio Devices

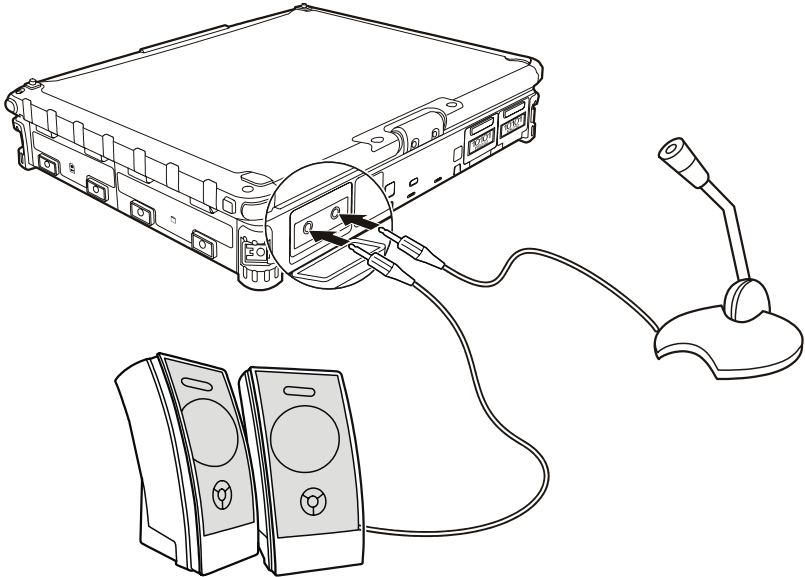For higher audio quality, you can send or receive sound through external audio devices.



NOTE: After connecting an external audio device, make sure that you specify the use of the correct audio device in Windows.

- **Audio Output Connector** () can be connected to speakers, headphones, or earphone set.
- **Microphone Connector** () can be connected to an external microphone for recording voice or sound.

NOTE: When using the external speakers/headphones or microphone, you cannot use the internal one.


Using the Communication Features

Using the Modem

NOTE: To take advantage of the modem feature, the device driver supplied with your computer must be installed. (See chapter 6 for details.)

The internal 56 K fax/data modem allows you to use the telephone line to communicate with others by fax, email, or connect to an online service or bulletin board.

To connect the telephone line to the modem, connect one end of the modem cable to the RJ-11 connector on the computer and the other end to the phone line.

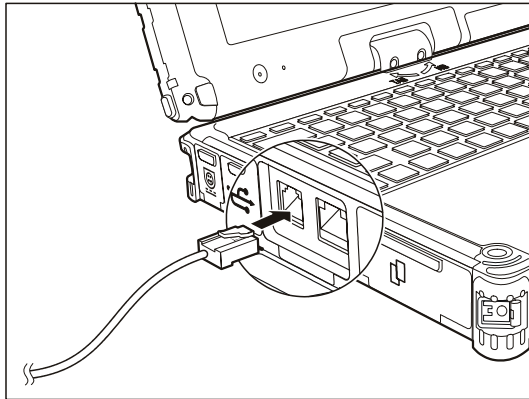

NOTE:


- When using the communication software, you may have to disable power management.
- Set the COM port of the modem to COM3.
- Set parameters such as modem speed (baud rate) and line type (pulse dialing or tone dialing).
- Do not enter the Standby mode when using the communication software.

Using the LAN

NOTE: To take advantage of the LAN feature, the device driver supplied with your computer must be installed. (See chapter 6 for details.)

The internal 10/100/1000Base-T LAN (Local Area Network) module allows you to connect your computer to a network. It supports data transfer rate up to 1000 Mbps.

To connect the network cable to the LAN module, connect one end of the LAN cable to the RJ-45 connector on the computer and the other end to the network hub.

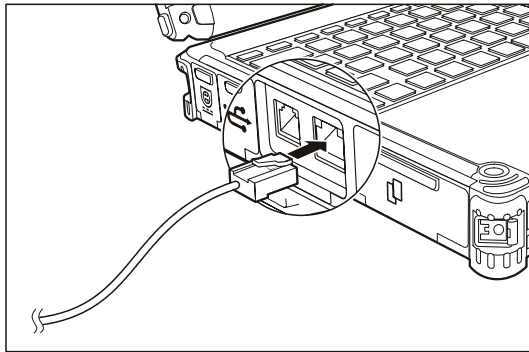

Using the Wireless LAN

Depending on your model, an internal mini PCI-E wireless LAN (WLAN) card may have been pre-installed by your computer manufacturer at the factory. This card allows you to access corporate networks or the Internet in a wireless environment.

The WLAN features include:

- Peer-to-Peer (Ad-Hoc) and Access Point (Infrastructure) modes support
- WEP (Wired Equivalent Privacy) 64/128-bit data encryption
- IEEE 802.11a/b/g standard compliance

Technology	802.11a	802.11b	802.11g
Stated Maximum Throughput (Mbps)	54	11	54
Data Rates (Mbps)	54, 48, 36, 24, 18, 12, 9, 6	11, 5.5, 2, 1	54, 36, 18, 9
Band (GHz)	5.15 ~ 5.35	2.412 ~ 2.462	2.4
Modulation Technology	OFDM (Orthogonal Frequency Division Multiplexing)	DSSS (Direct Sequence Spread Spectrum)	OFDM (Orthogonal Frequency Division Multiplexing)

NOTE: 802.11g mode is backward compatible with 802.11b mode.


To take advantage of the WLAN feature, make sure that the PROSet driver is installed correctly. (See chapter 6 for details.) If your WLAN card was provided by your dealer instead of the computer manufacturer, contact your dealer for the correct driver to use.

Installing the Mini PCI-E WLAN Card


In case the mini PCI-E WLAN card has not been installed in your computer, perform the following:

1. Remove the battery pack (see chapter 3) and make sure that the computer is not connected to AC power.
2. Carefully place the computer upside down.


3. Remove the two screws and open the compartment cover.

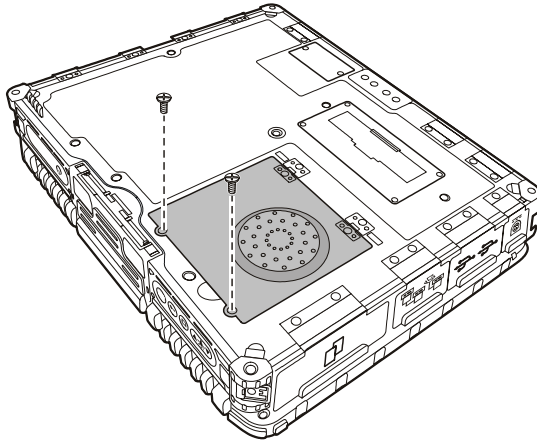


4. To install the card, match the notched part of the card with the socket's projected part, and firmly insert the card into the socket horizontally.

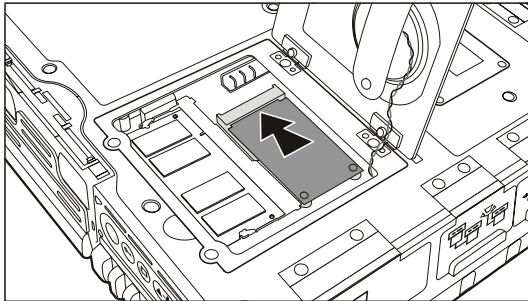

5. Secure with two screws.

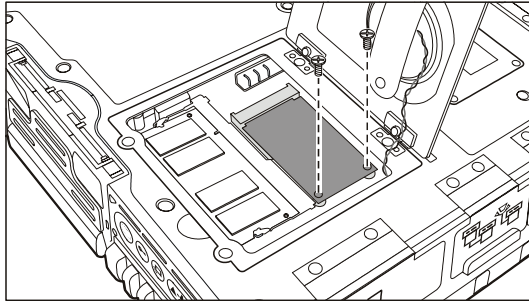

6. Connect the antenna cable (see label for the correct one) to the “MAIN” and “AUX” antenna connectors on the card.

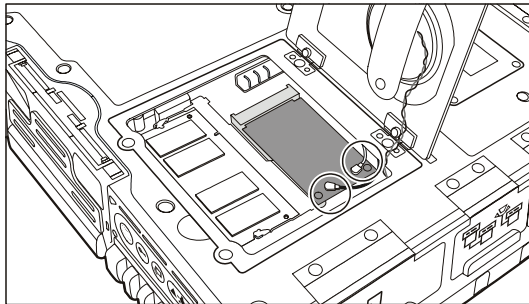

7. Close the compartment cover and secure with two screws.

Turning Off/On the WLAN Radio

NOTE: The FAA (Federal Aviation Agency) has deemed it unsafe to operate wireless devices in aircraft as this may interfere with flight safety. Remember to turn off wireless LAN when using your computer in the airplane.

Using Hot Keys


Your computer has a built-in **Fn+F2** WLAN hot key to switch the WLAN on/off (see “Hot Keys” in Chapter 2).

If you need to temporarily turn off the radio, press **Fn+F2**. To resume network connection, press **Fn+F2** again.

Using the Module SW Utility

| NOTE: Make sure to install the Module SW driver (see chapter 6 for details).

1. Right-click the Module SW icon on the system tray.



2. Click **WLAN** to toggle between turning the Wireless LAN radio **ON/OFF**.

It takes approximately 30 seconds for your computer to make a successful WLAN connection and approximately 10 seconds to disconnect.

Connecting to a Wireless Network

To connect to a wireless network:

1. Make sure that the WLAN radio is on (controlled by **Fn+F2**).
2. Click **Start** and then **Programs**.
3. Click **Intel PROSet Wireless** and then **Intel PROSet Wireless**.

4. If any wireless network is detected, the following window appears on screen.



5. Click to select a wireless network to connect to, and then click **Connect**.
6. Depending on the settings, you may be asked to enter a wireless security password (encryption key).

For more information on the Intel PROSet Wireless utility, click **Help?** in the **Intel(R) PROSet/Wireless** window.



Using the *Bluetooth®* Wireless Feature (Optional)

NOTE: To take advantage of the *Bluetooth®* wireless feature, the Bluetooth and Module SW driver supplied with your computer must be installed. (See chapter 6 for details.)

Depending on your model, your computer may incorporate the Bluetooth capability for short-range (about 10 meters) wireless communications between devices without requiring a cable connection.

With Bluetooth, data can be transmitted through walls, pockets and briefcases as long as two devices are within range. By default, your computer's Bluetooth feature is active (always ON) upon booting your computer and is in the general discoverable and pairable mode.


The status of the Bluetooth connection is indicated by the Bluetooth icon located in the system tray in the lower-right part of the screen.

Status	Icon
On	 (blue with white logo).
Connected	 (blue with green logo)

You can use the Bluetooth Utility to configure Bluetooth connection settings and transfer files.

Turning On/Off the *Bluetooth®* Wireless Feature


1. Right-click the Module SW icon on the system tray.




2. Click **Bluetooth** to toggle between turning the *Bluetooth®* wireless feature **ON/OFF**.

Connecting to Another Bluetooth Device


1. Make sure that the target Bluetooth device is turned on, discoverable and within close range. (See the documentation that came with the Bluetooth device.)
2. Click **Start** and then **Programs**.
3. Click **IVT BlueSoleil** and then **BlueSoleil**. The following screen appears.

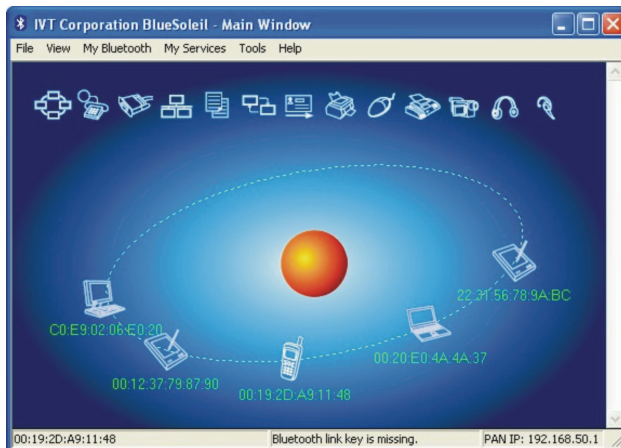

4. Click **View**, then **Refresh Devices** to check if any Bluetooth device is detected.




5. To connect to a new device, click **Tools** then click **Add New Device**.

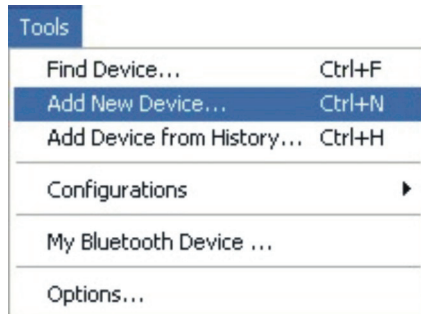

6. Depending on the type of Bluetooth device that you want to connect to, you will need to enter the pertinent information.

For detailed information on using the Bluetooth Utility, see the Bluetooth Utility Help on your computer by clicking on **Help**, then **Contents and Index**.

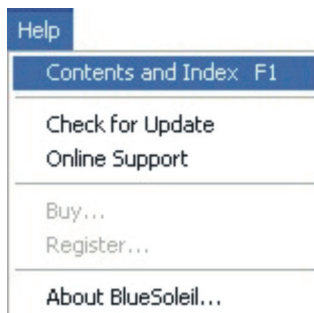

Using the GPS (Optional)

NOTE:

- To take advantage of the GPS feature, the GPS driver supplied with your computer must be installed.
- You may need to install third-party software to fully take advantage of the GPS feature.

Navigation and positioning are crucial to so many activities. To try to figure out where you are and where you are going, you need GPS technology. The Global Positioning System (GPS) is a worldwide radio-navigation system.

Managing Power

Your computer operates either on external AC power or on internal battery power.

This chapter tells you how you can effectively manage power. To maintain optimal battery performance, it is important that you use the battery in the proper way.


The topics in this chapter include:

- What is an AC adapter
- How to charge the battery pack
- How to use the Battery Automatic Calibration Utility
- How to check the battery level
- How to replace the battery pack
- What happens when the battery is low and what actions to take
- What is Power Management
- How to save power

AC Adapter

CAUTION:

- The AC adapter is designed for use with your computer only. Connecting the AC adapter to another device can damage the adapter.
- The AC power cord supplied with your computer is for use in the country where you purchased your computer. If you plan to go overseas with the computer, consult your dealer for the appropriate power cord.
- When you disconnect the AC adapter, disconnect from the electrical outlet first and then from the computer. A reverse procedure may damage the AC adapter or computer.
- When unplugging the connector, always hold the plug head. Never pull on the cord.

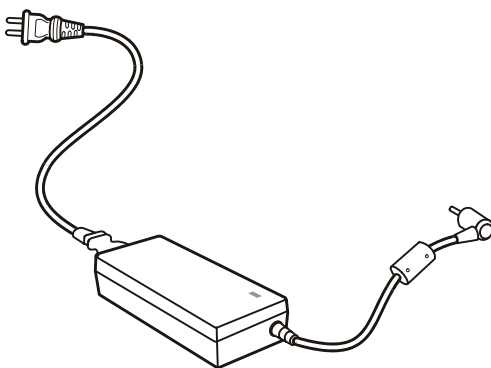

The AC adapter serves as a converter from AC (Alternating Current) to DC (Direct Current) power because your computer runs on DC power, but an electrical outlet usually provides AC power. It also charges the battery pack when connected to AC power.

The adapter operates on any voltage in the range of 100 ~ 240 V AC.

Battery Pack

The battery pack is the internal power source for the computer. It is rechargeable using the AC adapter.


The operating time of a fully charged battery pack depends on how you are using the computer. When your applications often access peripherals, you will experience a shorter operating time.

NOTE: Care and maintenance information for the battery is provided in the “Battery Pack Guidelines” section in Chapter 7.

Charging the Battery Pack

NOTE:

- Charging will not start if the battery's temperature is below 0 °C (32 °F) or above 60 °C (140 °F).
- The charging process will stop and the Battery Charge Indicator flashes green when the battery's temperature gets above 60 °C (140 °F). If this happens, the battery pack may be damaged. Please contact your dealer.
- During charging, do not disconnect the AC adapter before the battery has been fully charged; otherwise you will get a prematurely charged battery.

To charge the battery pack, connect the AC adapter to the computer and an electrical outlet. The Battery Charge Indicator () on the computer glows yellow to indicate that charging is in progress. You are advised to keep the computer power off while the battery is being charged. When the battery is fully charged, the Battery Charge Indicator is off.

It takes approximately 3 hours to fully charge the Li-Ion battery pack when the computer is off, and approximately 6 hours to fully charge the Li-Ion battery pack when the computer is on.


CAUTION: After the computer has been fully recharged, do not immediately disconnect and reconnect the AC adapter to charge it again. Doing so may damage the battery.

NOTE: The battery level may automatically lessen due to the self-discharge process (0.21 % per day), even when the battery pack is fully charged (100 %). This happens no matter if the battery pack is installed in the computer.

Battery Automatic Calibration Utility

NOTE: To use the Battery Automatic Calibration Utility, the BT Calibration driver supplied with your computer must be installed (see chapter 6 for details).

After installing the Battery Pack Automatic Calibration Utility, the **Battery Monitor** will call up the **Battery Learning** program every month. Before running **Battery Monitor**, it will check if the battery temperature is between 10 °C and 39 °C. When it is between 10 °C and 39 °C, the following screen appears.

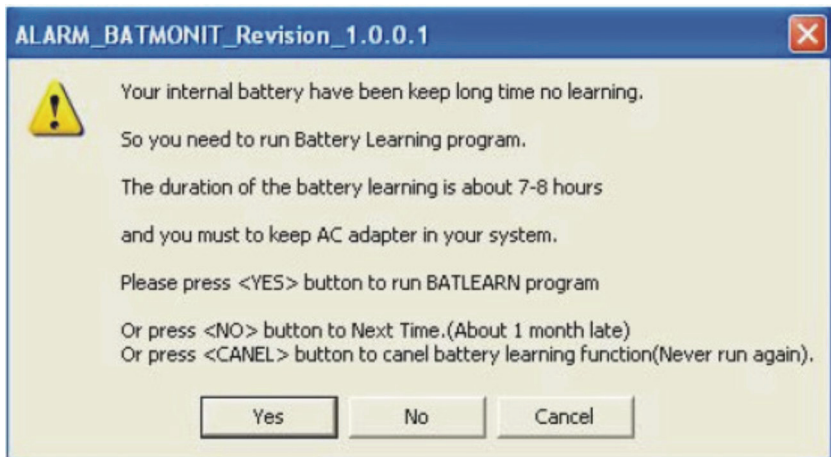

Click **Yes** to run the **Battery Learning** program's recalibration function to fully charge the battery pack, discharge it completely, then fully charge it again.

Click **No** if you do not wish to run the **Battery Learning** program's recalibration function now.

Click **Cancel** if you do not wish the **Battery Monitor** to call up the **Battery Learning** program every month to run the **Battery Learning** program's recalibration function.

Error Messages

The battery's performance would degrade as part of its normal wear-and-tear after using it for a considerable length of time. The **Battery Monitor** program would check the battery's condition and may display the following error messages. You are recommended to replace the battery.

Error Message	What it means ...
The Battery is BAD !! Battery Discharge FAIL, Discharge Timer <= Minimum Discharge Time	Battery's performance has gradually deteriorated. The discharge time is quite short.
The Battery is BAD !! Battery Charge FAIL, Charge Timer over time	Battery's performance has deteriorated. It cannot be charged.
The Battery is BAD !! Battery Charge FAIL, Charge Timer <= Minimum Charge time	Battery's performance has gradually deteriorated. Battery capacity is too little.
The Battery is BAD !! Battery Discharge FAIL, Discharge Timer >= Maximum Discharge Time	Battery's discharge circuit is bad. It cannot discharge.



NOTE: Running the Battery Learning program does not increase the battery's capacity.

CAUTION: Performing Battery Learning at frequent intervals will degrade the battery pack.

Checking the Battery Level


NOTE: Any battery level indication is an estimated result. The actual operating time can be different from the estimated time, depending on how you are using the computer.

By Operating System

You can check the approximate battery level using the battery meter function of the operating system. To read the battery level in Windows, click the  icon on the taskbar. (Click the  icon if the computer is using AC power.)

By Gas Gauge

On the exterior side of the battery pack is a gas gauge for displaying the estimated battery charge. When the battery pack is not installed in the computer and you want to know the battery charge, you can press the switch with a pointed device to see the corresponding value of indicator segment that light green. The value of the corresponding green segment indicates the relative percentage of the battery charge. The battery pack is fully discharged when you see no segment glowing green.

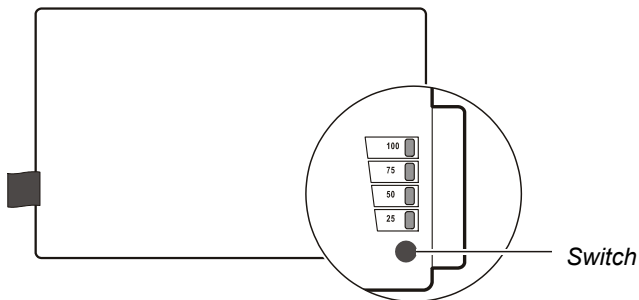

Replacing the Battery Pack


CAUTION:

- There is danger of explosion if the battery is incorrectly replaced. Replace the battery only with the computer manufacturer's optional battery packs. Discard used batteries according to the dealer's instructions.
- Do not attempt to disassemble the battery pack.


If you often rely on battery power for a long period of time while traveling, you may consider the purchase of an additional battery pack from your dealer and keep it with you in a fully charged state as a backup.

To replace the battery pack, follow these steps:


1. Make sure that the computer is not turned on or connected to AC power.
2. Locate the battery compartment on the right side of the computer.
3. Open the compartment cover by pressing on both sides of the release latch using your thumb and index fingers.

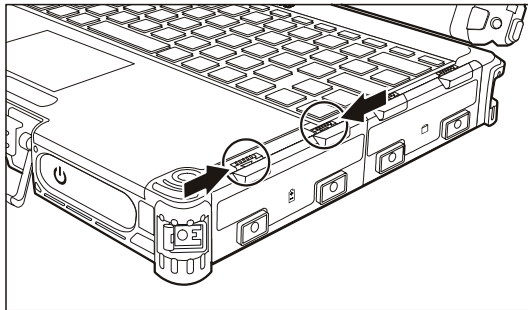

4. Pull on the ribbon strip to remove the battery pack.

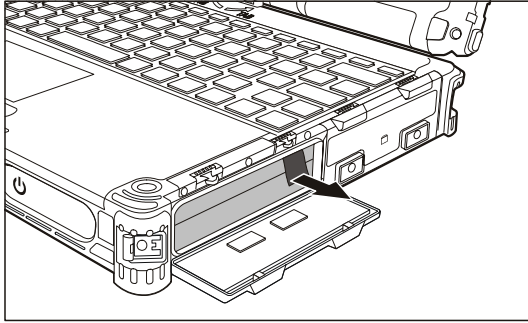


5. Slide the new battery pack all the way into the slot. Make sure to observe the correct orientation (the ribbon strip must face outward for future battery back removal).

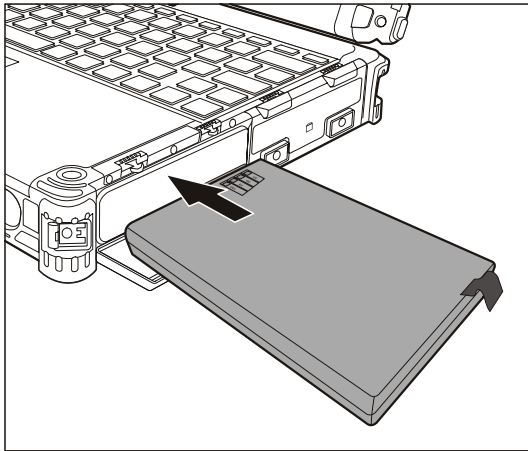

6. Close the compartment cover to secure the battery pack.

Battery Low Signals and Actions

Battery Low occurs when the battery has approximately 10 % (Windows default setting) of its charge remaining. The computer gives warning beeps or messages and the Battery Charge Indicator () blinks yellow to alert you to take actions.

NOTE: You can set up your threshold and signals of Battery Low under Windows.

Immediately save your data upon Battery Low. The remaining operating time depends on how you are using the computer. If you are using the audio subsystem, PC card, hard or USB flash disk, the battery might run out of charge very quickly.

Always respond to Battery Low by placing your computer on the Standby or Hibernation mode, turning off the computer, or connecting the AC adapter.

If you do not take any action, the computer will automatically hibernate and turn off.

CAUTION:

- If you are using a PC card, do not access the card during battery low periods. This is because the access may take longer than the time it takes the battery to run out of charge, thus making your access to the card unsuccessful.
- If you fail to save your data when the battery completely runs out of charge, then you lose your data.

Power Management

Your computer supports ACPI (Advanced Configuration and Power Interface) for power management. The power management feature allows you to reduce the power consumption for energy saving.

With an ACPI-compliant operating system such as Windows XP, power supply to different computer components is controlled on an as-needed basis. This allows maximum power conservation and performance at the same time.

In general, Windows' power management works in this way:

What...	When...
Power to the hard disk is turned off	When the hard disk has been idle for a set period.
Power to the display is turned off	When the display has been idle for a set period.
The computer enters the Standby mode. The hard disk and display are turned off and the entire system consumes less power.	When the entire system has been idle for a set period.
	When you press the Fn+F10 hot key. *
	When you close the cover. *
The computer enters the Hibernation mode. (See the next subsection for more information.)	When you press the power button. *
	When you press the Fn+F10 hot key. *
	When you close the cover. *
	When you press the power button. *

* Depends on your settings in Windows.

For detailed information on power management, see Windows' Help.

Hibernation

NOTE: Make sure that the hibernation feature is enabled in the **Hibernate** tab of the **Power Options** Properties from the Control Panel in Windows XP.

Hibernation is a very useful feature. People frequently open many applications when they use computers. It takes some time to get all these applications open and running, and normally they all have to be closed before the computer can be turned off.

When you use the hibernation feature, you do not have to close the applications. The computer stores the state of your computer to a file on the hard disk and then shuts down. The next time you turn on your computer, you return to exactly where you left off.

Power-Saving Tips

Aside from enabling your computer's power saving mode (see previous section), you can do your part to maximize the battery's operating time by following these suggestions.

- Do not disable Power Management.
- Decrease the LCD brightness to the lowest comfortable level.
- If you work with an application that uses a PC card, exit the application when you finish using it.
- If you have a PC card installed, remove it when not in use. Some PC cards drain power even while they are inactive.
- Deactivate the WLAN function if you are not using it (see Chapter 2).
- Turn off the computer when you are not using it.

Expanding Your Computer

You can expand the capabilities of your computer by connecting other peripheral devices. When using a device, be sure to read the instructions accompanying the device together with the relevant section in this chapter.


This chapter gives guidelines on installing and using these devices:

- External monitor (option)
- Serial device
- USB device
- PC card
- Card Reader
- Port Replicator
- System memory

Connecting an External Monitor (Optional)

If you want the benefits of a larger display screen with higher resolution, you can connect an external display monitor to your computer. Follow this procedure to connect an external monitor:

1. Make sure that the computer is not turned on.
2. Plug the monitor's D-type signal connector to the computer's VGA connector.

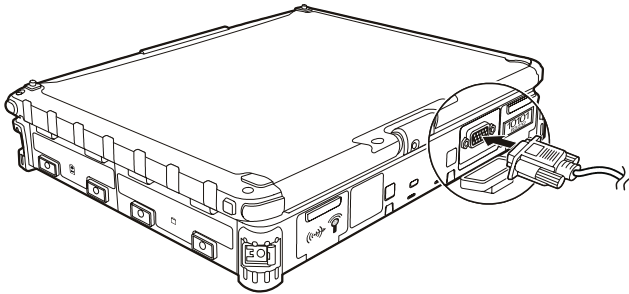

3. Plug one end of the monitor's power cord into the power socket on the monitor and the other end to an electrical outlet.
4. To use the monitor, turn on the monitor before turning on the computer.
5. The monitor should respond by default. If not, you can switch the display to the monitor or to both (simultaneous display), or to multi-display by pressing the **Fn+F9** hot key. In Windows, you can also change the display through the settings in **Display Properties**.
6. You can change display settings through your operating system. See your operating system documentation or online help for specific information.


CAUTION: Do not disconnect the external monitor while the computer is in the Standby mode or Hibernation mode. If no external monitor is connected when the computer resumes, the LCD might not display properly.

Connecting a Serial Device

Your computer has one or two serial port (depending on model) for connecting a serial device such as a serial mouse or serial communication device (modem).

Follow this procedure to connect a serial device:

1. Make sure the “Serial Port COM1/COM2” item is set properly in the BIOS Setup program. (See “Advanced Menu” in Chapter 5 for information.)
2. Make sure the computer is not turned on.
3. Plug the device cable to the serial port on the rear of the computer.

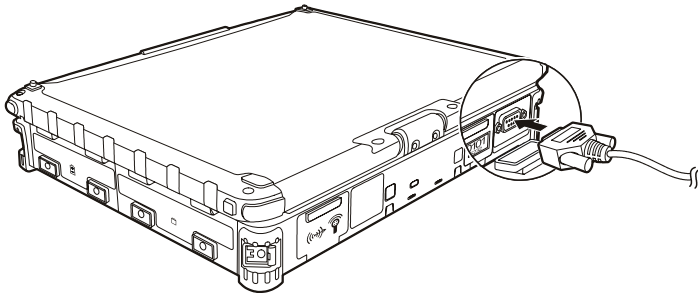

4. Turn on the computer.


NOTE: Portable modems that derive power through the serial port cannot be used with the computer. Instead, use a modem that is powered by its own internal battery or external AC power.

Connecting a USB Device

Your computer has two USB ports for connecting USB devices, such as a digital camera, scanner, printer, modem, and mouse.

The USB ports support transfer rates up to 12 MB/s for USB 1.1 devices and 480 MB/s for USB 2.0 devices.

To connect a USB device, simply plug the device cable to one of the USB ports.

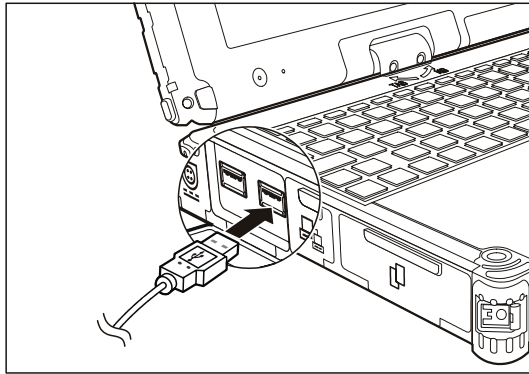

Using PC Cards

Your computer has two PC card slots that can accommodate type II cards. Typical type II cards are flash memory, SRAM, modem, LAN, and SCSI cards. Your computer's PC card slot supports CardBus specifications.


Inserting and Removing a PC Card

NOTE:

- Some PC cards require additional system resources. Before using such PC card, you may have to free other system resources for the PC card.
- Although some PC cards can be inserted and removed without turning off the computer, you cannot remove or install PC cards during Standby mode.


To insert a PC card:

1. Locate the PC card slot on the left side of the computer.
2. Slide the PC card, with its label facing up, into the slot until the eject button pops out.

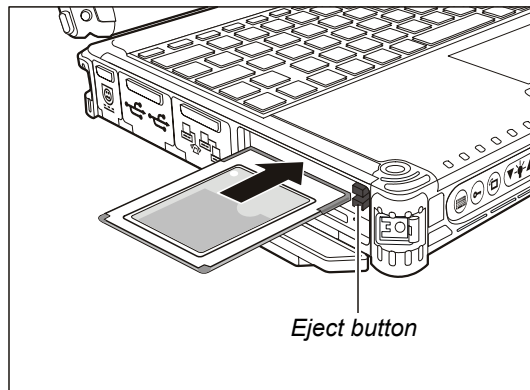

3. When a new card is seated, the computer will detect it and try to install the appropriate driver. Follow the on-screen instructions to complete the process.

To remove a PC card:

1. Double-click on the **Safely Remove Hardware**  icon found on the Windows XP taskbar and the **Safely Remove Hardware** window appears on screen.
2. Select (highlight) the PC card from the list to disable the card.
3. Push the eject button and the card will slide out slightly.
4. Pull the card out of the slot.

Using the Card Reader

NOTE:

- To use the Card Reader, the SD Reader driver supplied with your computer must be installed (see chapter 6 for details).
- If your hard disk is divided into several drives, make sure that all drives have been formatted before using the Card Reader. Otherwise, you may encounter problems when using the Card Reader.
- You can use only storage cards. Your Card Reader does not support cards with I/O (input/output) functions such as a wireless network card or Bluetooth card.

Your computer has a Card Reader. The Card Reader is a small drive for reading from and writing to removable storage cards (or called memory cards). The Card Reader supports Secure Digital (SD) cards.

Shown next is the appearance and size of Secure Digital (SD) card type for your reference.




24×32×2.1 (mm)

To insert a storage card:

1. Locate the Card Reader slot on the left side of the computer.

2. Align the card with its connector pointing to the slot and its label facing up. Slide the card into the slot until it reaches the end.

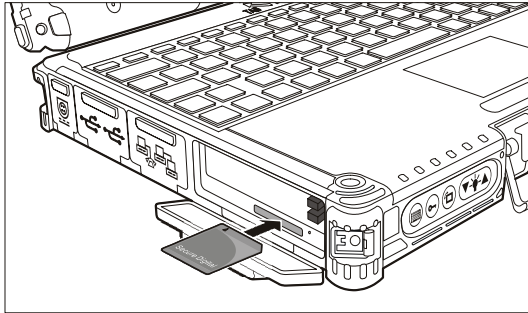

3. Windows will detect the card and assign it a drive name (typically E).


To remove a storage card:

1. Double-click **My Computer**.
2. Right-click the drive with the card and select **Eject**.
3. Pull the card out of the slot.


Using the Port Replicator (Optional)

A port replicator is available as an option. This device eliminates the hassles of having you connect and disconnect the various cables when carrying your computer around and allows a variety of peripherals to be connected including a headphone or microphone, etc. The port replicator connects to the expansion bus connector at the bottom of your computer.

1. Slide open the expansion bus connector cover.

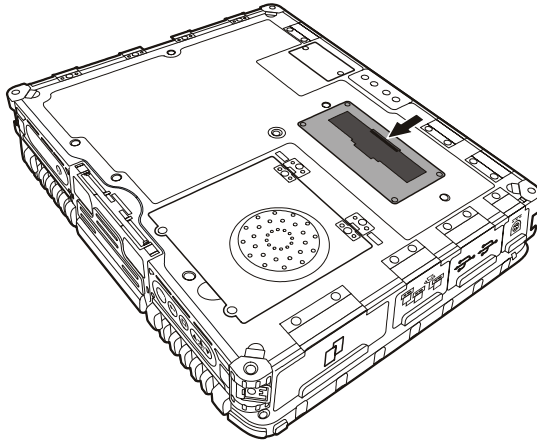

2. Connect your port replicator to the expansion bus connector.

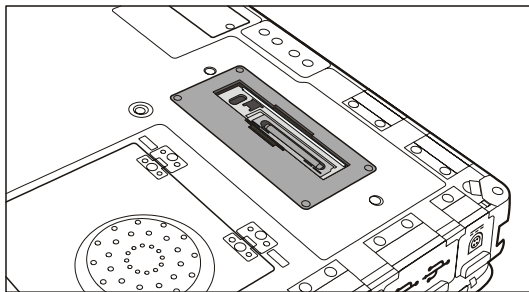

For more detailed information, refer to the Operating Instructions of the port replicator.

CAUTION: Hot/warm docking and hot/warm undocking are not possible with the port replicator.


System Memory Upgrade

You can upgrade your computer by changing system memory to a maximum of 1 GB on the 533 MHz DDR2 SO-DIMM slot.


CAUTION: RAM modules are extremely sensitive to static electricity. There are cases where static electricity generated by the human body has adversely affected such modules. When inserting or removing a RAM module, do not touch the terminals or internal components, insert objects other than the module, or allow foreign particles to enter. Doing so has been known to cause damage, fire, or electrical shock.

To install the RAM module:

1. Remove the battery pack (see chapter 3) and make sure that the computer is not connected to AC power.
2. Carefully place the notebook computer upside down.
3. Remove the two screws to open the compartment cover.

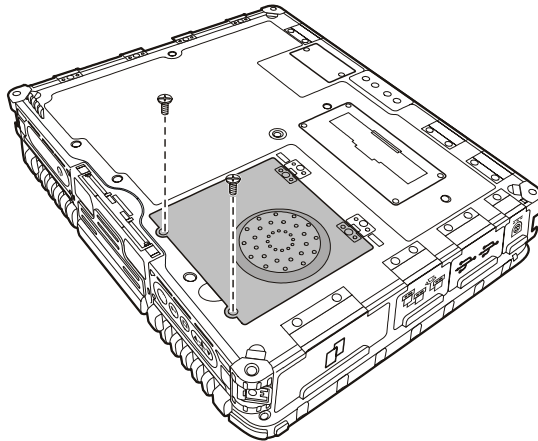

4. To install the RAM module, match the module's notched part with the socket's projected part and firmly insert the module into the socket at a 20-degree angle. Then push down until the retaining clips lock the module into position.

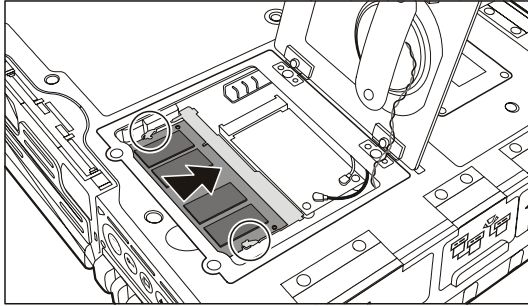

CAUTION: If the RAM module is difficult to insert or difficult to push down, do not force it. Check once more to ensure that the module is positioned correctly.

5. Close the compartment cover and secure with two screws.

Using BIOS Setup

BIOS Setup Utility is a program for configuring the BIOS (Basic Input/Output System) settings of the computer.

BIOS is a layer of software, called firmware, that translates instructions from other layers of software into instructions that the computer hardware can understand. The BIOS settings are needed by your computer to identify the types of installed devices and establish special features.

This chapter tells you how to use the BIOS Setup program.

When and How to Use BIOS Setup

When to Use

You need to run BIOS Setup Utility when:

- You see an error message on the screen requesting you to run BIOS Setup Utility.
- You want to restore the factory default settings.
- You want to modify some specific settings according to the hardware.
- You want to modify some specific settings to optimize the system performance.

Starting BIOS Setup

NOTE:

- The BIOS Setup Utility screens shown in this chapter are for your reference only. The actual items or settings on your computer may differ.
- The BIOS Setup Utility program may have been updated after the publication of this manual.
- The settings you select in your operating system might override similar settings in BIOS Setup Utility.

To run BIOS Setup Utility, press the **Enter** key or click the left touchpad button when the prompt appears on the screen during system startup. The prompt shows up on the screen for only a few seconds. You must press the **Enter** key or click the left touchpad button quickly. A small window appears, select **Launch System Setup**. The BIOS Setup Utility main screen appears as shown next.

Main	Advanced	Security	Boot	Exit	
Model: V100 SATA Hard Disk 0 TOSHIBA MK8032GSX-(S1) SATA Hard Disk 1 None System Time: [16:34:08] System Date: [01/18/2007] CPU Type Genuine Intel(R) CPU CPU Speed 1200 MHz Extended Memory 514048 KB System BIOS Version: R1.00 KBC/EC BIOS Version: R1.00					Item Specific Help <Tab>, <Shift-Tab>, or <Enter> selects field.
F1 Help Esc Exit	↓↑ Select Item ↔ Select Menu	+/- Change Values Enter Select	► Sub-Menu	F9 Setup Defaults F10 Save and Exit	

The BIOS Setup Utility screen can be divided into four areas:

- On the top is the menu bar containing the titles of the available menus. Each menu title brings a specific menu.
- The left column of the menu displays the menu items.
- The right column of the menu provides more detailed information when a menu item is highlighted.
- The bottom of the menu provides keyboard instructions for moving around and making selections.

Moving Around and Making Selections

You must go through two or three levels to complete the setting for an item. In most cases, there are two levels: menu title and submenu.

Use the keyboard to move around and make selections. Keyboard information can be found at the bottom of the screen. A brief description of keyboard usage is listed next:

Key	Function
← , →	Selects a menu title.
↑ , ↓	Selects an item or option.
+ / –	Changes the value.
Enter	1) Brings up the sub-menu when available. 2) Opens or closes the option window when an item is selected.
Esc	1) Exits BIOS Setup Utility. 2) Closes the option window if one is open.
F1	Provides help information.
F9	Loads setup defaults.
F10	Saves and exit the BIOS Setup Utility.

Main Menu

The Main menu contains the system date and time settings as well as shows the basic configuration of the system.

Main	Advanced	Security	Boot	Exit	
<div>Model: V100</div> <div>SATA Hard Disk 0 TOSHIBA MK8032GSX-(S1)</div> <div>SATA Hard Disk 1 None</div> <div>System Time: [16:34:08]</div> <div>System Date: [01/18/2007]</div> <div>CPU Type Genuine Intel(R) CPU</div> <div>CPU Speed 1200 MHz</div> <div>Extended Memory 514048 KB</div> <div>System BIOS Version: R1.00</div> <div>KBC/EC BIOS Version: R1.00</div>					Item Specific Help
					<Tab>, <Shift-Tab>, or <Enter> selects field.
F1 Help	↕ Select Item	+/- Change Values			F9 Setup Defaults
Esc Exit	↔ Select Menu	Enter Select	▶ Sub-Menu		F10 Save and Exit

System Time sets the system time.

System Date sets the system date.

Advanced Menu

The Advanced menu contains the advanced settings as below.

Main Advanced Security Boot Exit			
SATAAHCI Configuration:		[Disabled]	Item Specific Help
TouchScreen:		[Enabled]	Enhanced AHCI: WinXP-SP1+IAA driver supports AHCI mode.
Serial Port COM1:		[Enabled]	
Serial Port COM2:		[Enabled]	
Serial Port COM4:		[Enabled]	
Boot-time Diagnostic Screen:		[Disabled]	
F1 Help Esc Exit	↓↑ Select Item ↔ Select Menu	+/- Change Values Enter Select ► Sub-Menu	F9 Setup Defaults F10 Save and Exit

SATA AHCI Configuration sets the enhanced AHCI (Advanced Host Controller Interface). Windows XP Service Pack 1 + IAA driver supports AHCI mode.

TouchScreen enables or disables the touchscreen function (if available on your model).

Serial Port COM1/COM2/COM4 allows you to unconditionally disable it when set at *Disabled*.

Boot-time Diagnostic Screen allows you to display the diagnostic screen during system boot-up.

Security Menu

The Security menu contains the security settings, which safeguard your system against unauthorized use.

Main Advanced Security Boot Exit			
Supervisor Password is:		Clear	Item Specific Help Supervisor Password control access to the setup utility.
User Password is:		Clear	
Set Supervisor Password		[Enter]	
Set User Password		[Enter]	
Disk access:		[Supervisor]	
Fixed disk boot sector:		[Normal]	
Password on boot:		[Disabled]	
TPM Support		[Disabled]	
F1 Help Esc Exit	↓↑ Select Item ↔ Select Menu	+/- Change Values Enter Select ► Sub-Menu	F9 Setup Defaults F10 Save and Exit

Supervisor/User Password Is shows whether you have set the supervisor/user password or not for the system.

Set Supervisor/User Password sets the supervisor/user password. When typing the password, first make sure that Num Lock is off, and then type the password in the entry fields and press **Enter**. Confirm your password by typing it again and pressing **Enter**. You can set the supervisor/user password to be required for starting up the system and/or entering SCU.

- NOTE:
- You can set the user password only when the supervisor password has been set.
 - If both the administrator and user passwords are set, you can enter any of them for starting up the system and/or entering SCU. However, the user password only allows you to view/change the settings of certain items.

Disk access allows you to control access to external floppy drives.

Fixed disk boot sector allows you to set if a warning message will appear when the hard disk boot sector (partition table) has been changed.

CAUTION: Set this item to disabled before installing an Operating System, running `Fdisk` or `Format` program. Otherwise, the intended action will fail.

Password on Boot allows you to enable or disable the entering of password for booting up your system. Once the password is successfully set and this item is enabled, it is required for booting up the system.

TPM Support enables or disables TPM (Trusted Platform Module) support. The TPM is a component on your computer's mainboard that is specifically designed to enhance platform security above-and-beyond the capabilities of today's software by providing a protected space for key operations and other security critical tasks. Using both hardware and software, TPM protects encryption and signature keys at their most vulnerable stages – operations when the keys are being used unencrypted in plain-text form. TPM is specifically designed to shield unencrypted keys and platform authentication information from software-based attacks.

NOTE: To use the TPM feature, the TPM driver supplied with your computer must be installed (see chapter 6 for details).

Boot Menu

The Boot menu sets the sequence of the devices to be searched for the operating system.


Main Advanced Security Boot Exit	
Boot priority order: 1. USB FDC: 2. USB Key: 3. IDE HDD: TOSHIBA MK8032GSX-(S1) 4. USB CDROM: 5. PCI BEV: MBA V8.2.6 Slot 0200 6. 7. 8. Excluded from boot order: : USB HDD: : USB ZIP: : USB LS120: : Other USB: : PCI: : 1394 CDROM	Item Specific Help Keys used to view or configure devices: Up and Down arrows select a device. <+> and <-> moves the device up or down. <f> and <r> specifies the device fixed or removable. <x> exclude or include the device to boot. <Shift + 1> enables or disables a device. <1 – 4> loads default boot sequence.
F1 Help Esc Exit	↓↑ Select Item ↔ Select Menu +/- Change Values Enter Select ► Sub-Menu F9 Setup Defaults F10 Save and Exit

The bootable devices will be automatically detected during POST and shown here, allowing you to set the sequence that the BIOS uses to look for a boot device from which to load the operating system. A brief description of keyboard usage is listed next:

Key	Function
↑ , ↓	Selects (highlight) a boot device.
+, –	Changes the boot sequence.
1 to 4	Loads the default boot sequence.
f or r	Specifies if the device is fixed (f) or removable (r).
X	Moves the highlighted boot device from the “Boot priority order” list to the “Excluded from boot order” list, and vice versa.
Shift + 1	Deactivates/activates the highlighted boot device on the “Boot priority order” list. When a device has been deactivated, an “!” (exclamation) symbol appears beside the item and system will bypass it when detecting boot device during POST.

Exit Menu

The Exit menu displays ways of exiting BIOS Setup Utility. After finishing with your settings, you must save and exit so that the changes can take effect.

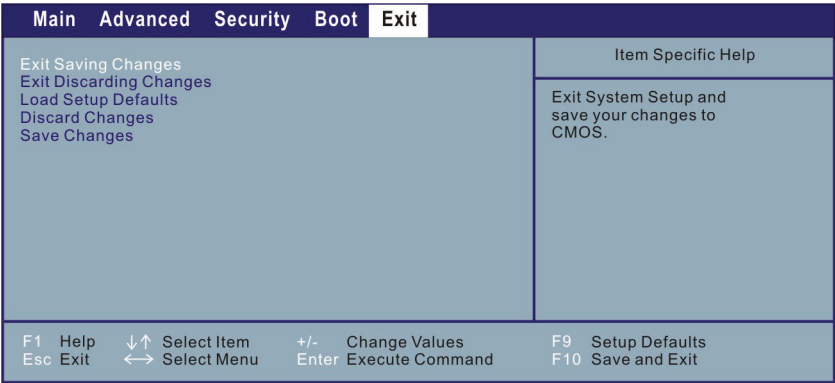

Exit Saving Changes saves the changes you have made and exits BIOS Setup Utility.

Exit Discarding Changes exits BIOS Setup Utility without saving the changes you have made.

Load Setup Defaults loads the factory default values for all the items.

Discard Changes restores the previous values for all the items.

Saves Changes saves the changes you have made.

When and How to Use the System Recovery Feature

When to Use

You need to run System Recovery when:

- Your computer does not start correctly.
- Your Windows operating system does not start at all.
- You want to restore the factory default Windows settings.

Starting System Recovery

WARNING: Using this feature will reinstall Windows to your system and configure it to the system's factory default settings. All data on the hard disk drive will be lost.

To run System Recovery:

1. During system startup when the following screen appears, press **Ctrl + Alt + F2** keys for four seconds or press **Enter** and select **HDI Recovery** when a small window appears on the screen.




2. The message **This will help you reinstall Windows to the whole HDD to factory default. All data on HDD will be lost** appears on the screen to ask if you want to access System Recovery. Type **1** to continue or type **0** to exit.
3. A warning message appears as follows:


You must accept the following terms before performing the recovery process:
1. The recovery software is solely the purpose of reinstalling or restoring software associated with the hard disk of this operating GETAC machine.
2. Except the above, no other use is granted hereunder.

(1)Yes, I agree to the provisions of this agreement and wish to continue.
(0)No, I do not agree to the provisions of this agreement and do not wish to continue.
Type **1** to continue.

4. Type **Y** when the message **Are you sure you want to recover now?** (**Y**) Yes (**N**) No appears onscreen. The following screen appears and system will perform the recovery process and Windows operating system will be re-installed to its default setting:

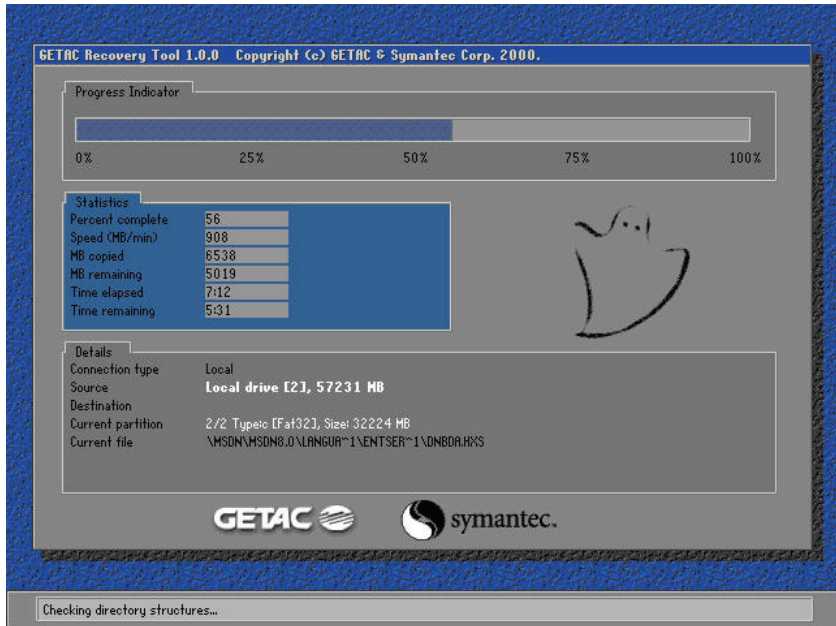

5. After the recovery process has been completed successfully, the GSI (GETAC Smart Installer) screen is displayed at the first boot-up of Windows operating system.

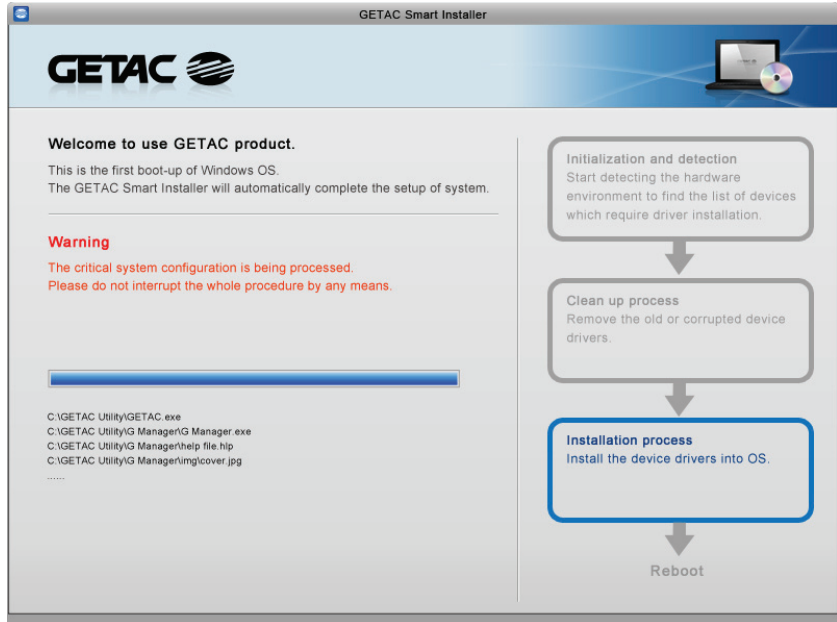

6. GSI will automatically perform system hardware detection and driver installation. After GSI has completed the whole process successfully, system will reboot.

Installing Software Drivers

To take full advantage of the unique features of your computer, some operating systems require custom software, known as drivers, to be installed.

If you purchased the computer with Windows pre-installed, your dealer may have already installed the drivers. If not, you need to install the drivers using the disc supplied with your computer.

This chapter describes how to install the drivers.

How to Use the Driver Disc

NOTE:

- The drivers may have been updated after this manual was published. For driver upgrade, please contact your dealer.
- This disc supports Windows 2000/XP only. You are recommended to install Windows XP Service Pack 2.
- The available items may differ according to your computer model.
- Do not remove the driver disc when installing the driver.

An autorun program is provided on the driver disc to help you easily install the drivers. As you insert the disc, the autorun program automatically starts. If you need to start the program manually, run the **Autorun.exe** program from the driver disc.

The main screen appears as shown next:



IMPORTANT: Except for the "Touchscreen," "GPS," "MTCCTRL," and "Module SW" drivers, to install the other necessary driver just click on the particular option and follow the onscreen instructions to continue and complete installation.

Drivers on the First Page

<i>Device Driver</i>	Ensures the full function of the following drivers. Install this main driver before installing the other drivers. Upon clicking this button, the chipset, VGA, audio, modem, and LAN drivers would be installed one after the other.
<i>PROSet</i>	Installs the Intel PROSet WLAN utility that allows your system to connect wirelessly to the Internet.
<i>TouchScreen</i>	Allows you to use your fingers (or optional touchscreen pen) as a pointing device on the LCD screen (refer to the next section for further instructions).
<i>Digitizer</i>	Allows you to use your digitizer pen (option) as a pointing device on the digitizer screen.
<i>TPM</i>	Upon clicking on this, the following screen appears.



<i>Driver</i>	Allows you to install the driver for using the TPM (Trusted Platform Module) support for security.
<i>Application</i>	Allows you to install the TPM application.
<i>SD Reader</i>	Allows you to use the Card Reader for reading from and writing to removable Secure Digital (SD) storage cards (or called memory cards).
NOTE: You need Adobe Acrobat Reader to open the manual file supplied on this driver disc. Install the Adobe Acrobat Reader program if you do not have it on your computer by clicking on Adobe Reader .	
<i>Browse CD</i>	Browses the contents of the driver disc.
<i>Exit</i>	Exits the driver installation.

Drivers on the Second Page

Upon clicking on *Next Page*, the following screen appears.



<i>WEBCAM</i>	Allows you to use the optional camera feature.
<i>GPS</i>	Upon clicking on this, the instructions for installing the GPS driver appears (refer to the next section for further instructions).
<i>WCDMA</i>	Allows you to install the Novatel EU740S3 / Sierra 8775V WCDMA driver and application.
<i>CDMA</i>	Allows you to install the Sierra 5720/25 driver and application.
<i>Bluetooth</i>	Allows you to install the Bluetooth driver and application program that allows you to use the Bluetooth feature. Refer to chapter 2 for detailed instructions on using the Bluetooth feature of your computer.

Smart Card Allows you to use the Smart Card Reader feature.

Drivers on the Third Page

Upon clicking on *Next Page*, the following screen appears.



Hotfix

Upon clicking on this, the following screen appears.



KB896256

Install this update to fix a situation where your Windows-based system that supports processor power management features, and is equipped with multiple processors, may experience decreased performance. After you install this item, you may have to restart your computer.

KB918005

Allows you to install the hotfix for ensuring a longer battery life when using USB 2.0 devices.

KB894391

KB921883

KB924692

Allows you to install the hotfix for using USB, WCDMA, and Bluetooth devices.

Vehicle Dock Upon clicking on this, the following screen appears.



Video Capture Allows you to capture video using the optional camera.

USB to COM Allows you to install the USB to COM (serial) port driver.

Module SW

Upon clicking on this, the following screen appears.



Module SW-A
(for USA)
Module SW-B
(for other
regions)

Allows you to power ON/OFF the *Bluetooth*[®] wireless feature / WLAN radio / 3G module as well as set the power ON/OFF state during system startup (refer to the next section for further instructions).

Upon clicking on this, the following screen appears.



MTCCTRL

Allows you to use the built-in heater feature that automatically turns on for low temperature hard disk drive operation (refer to the next section for further instructions).

MTCAPP

Allows you to use the software keyboard feature when using the computer in Tablet mode as well as toggle between portrait and landscape views.

OSD

Installs the OSD (on screen display) utility that provides a graphic display to indicate the current status of certain operations (see later section for details).

NOTE: The OSD utility is an option for you. You can decide whether you would like to have this utility installed.

Clock Utility

Installs the clock utility that allows your Windows OS clock to be synchronized with the RTC.

BT Calibration Upon clicking on this, the following screen appears.




Utility Installs the battery pack automatic calibration utility that includes the Battery Monitor and Battery Learning programs.


Help Upon clicking on this, the instructions for using the battery pack automatic calibration utility appears (refer to chapter 3 for further instructions).

NOTE: You need Adobe Acrobat Reader to open the User Guide. Install the Adobe Acrobat Reader program if you do not have it on your computer by clicking on **Adobe Reader**.

Touchscreen Utility


To install the touch screen utility, perform the following:

1. Insert the driver disc into the optical drive.
2. Click **TouchScreen** and follow the onscreen instructions to continue.
3. When finished installing, select **Yes** to reboot your system. The driver should now be loaded.
4. After the system has finished rebooting, right-click the **PenMount Monitor** icon  located on the taskbar and click **Control Panel** to bring up the **PenMount Control Panel**.

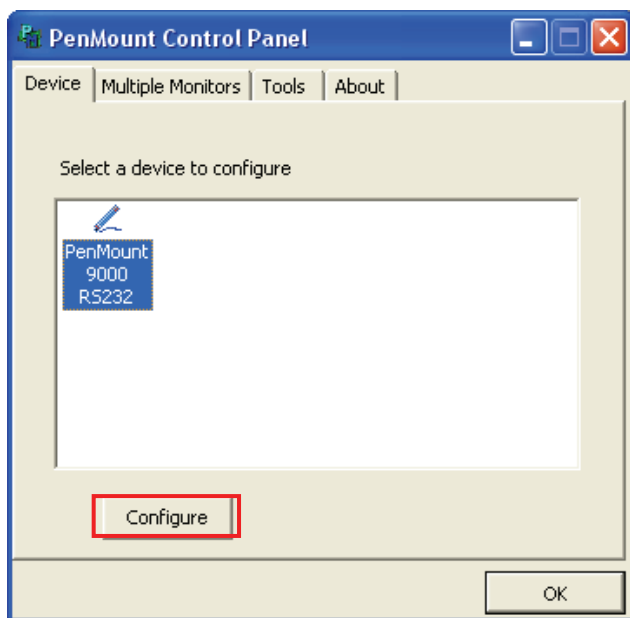


5. Select **PenMount 9000 RS232** then click **Configure**.

6. Click **Standard Calibration**.

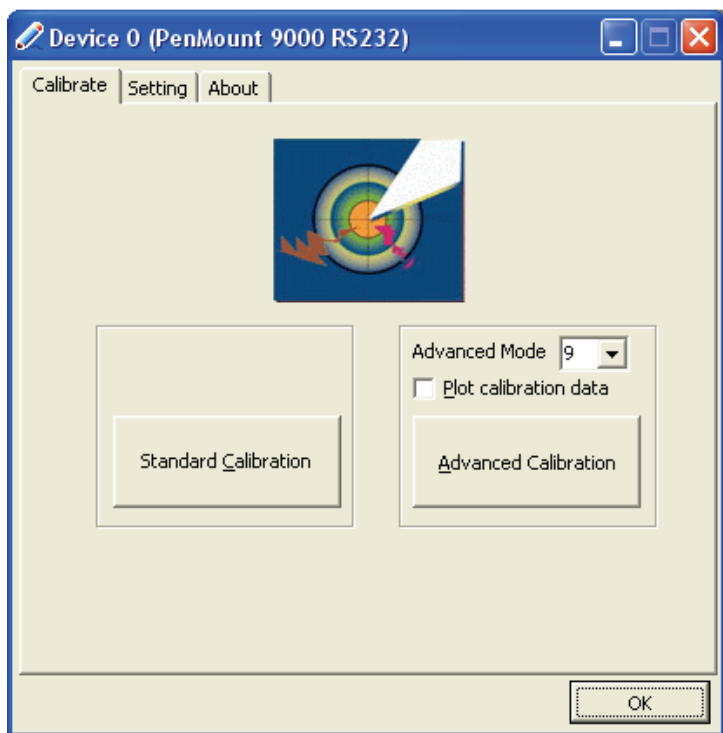


Standard Calibration lets you match the touch screen to your display so that the point you touch is accurately tracked on screen. Standard calibration only requires four points for calibration and one point for confirmation. Under normal circumstances Standard Calibration is all you need to perform an accurate calibration.

7. Click the red square on the screen to calibrate your touchscreen for use on the computer.

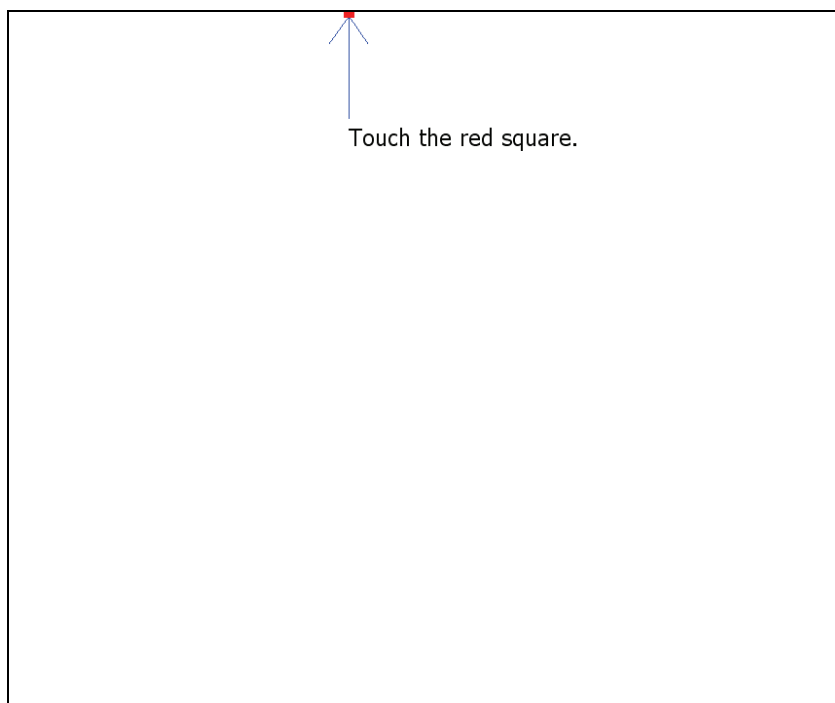


Advanced Calibration improves the accuracy of calibration by using more involved engineering calculations. Use this function only if you have tried the Standard Calibration and there is still a discrepancy in the way the touchscreen maps to the display. You can choose 4, 9, 16 or 25 points to calibrate, though we suggest that you first try 9 points, if it is still not tracking well then try 16 or 25 points. The more points you use for calibration, the greater the accuracy. Errors in calibration may occur due to viewing angle, or individual skill, and there may be little difference in using 16 or 25 points. Note that a touchscreen pen is recommended for the most accurate results

8. Click **Advanced Calibration** (if needed).

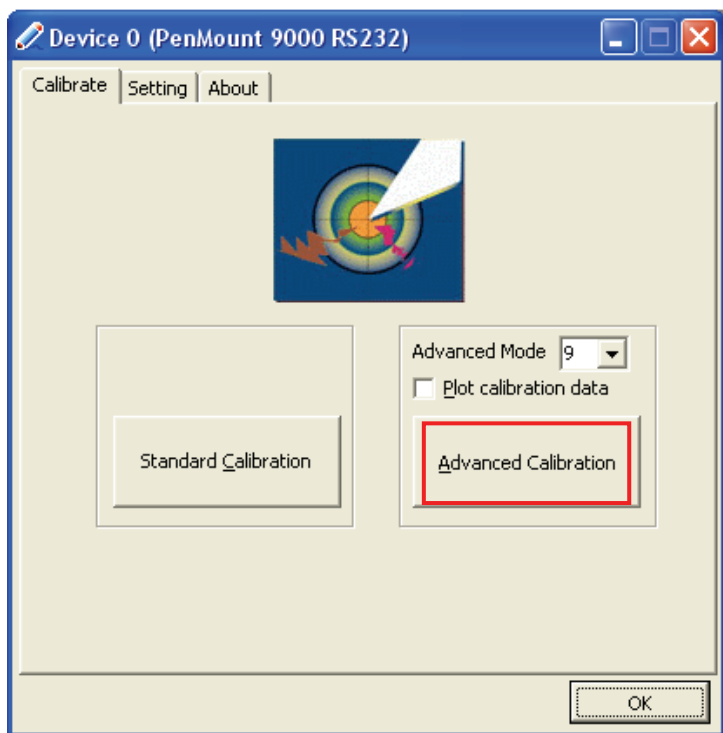


9. If your Windows' Graphics Controller setting is "Extended Desktop" and Primary Device is "Monitor," click the **Multiple Monitors** folder and select the **Multiple Monitor Support** option.

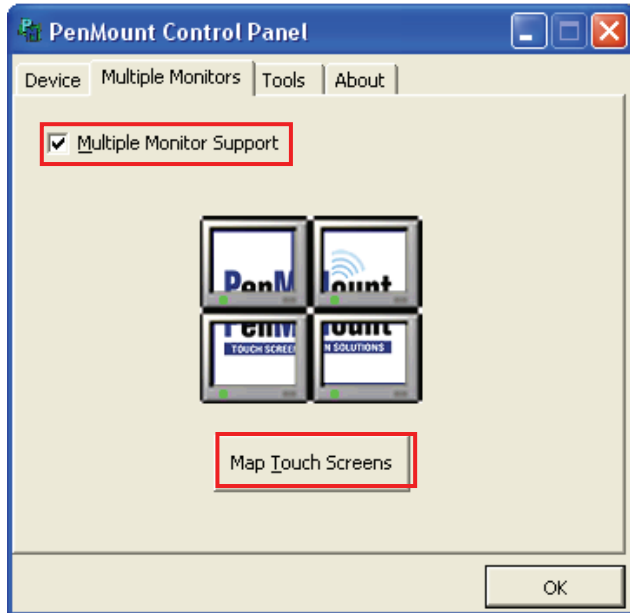


10. Click **Map Touch Screens**.
11. Then click **OK** to exit the **PenMount Control Panel**.

The **Tools** folder contains the following functions:

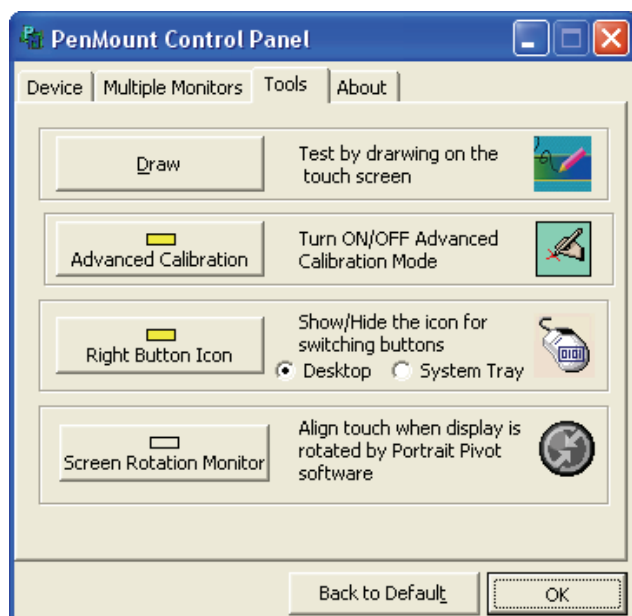

- **Draw** – allows you to test the touchscreen function by drawing on the screen. Upon clicking this button the following screen appears.

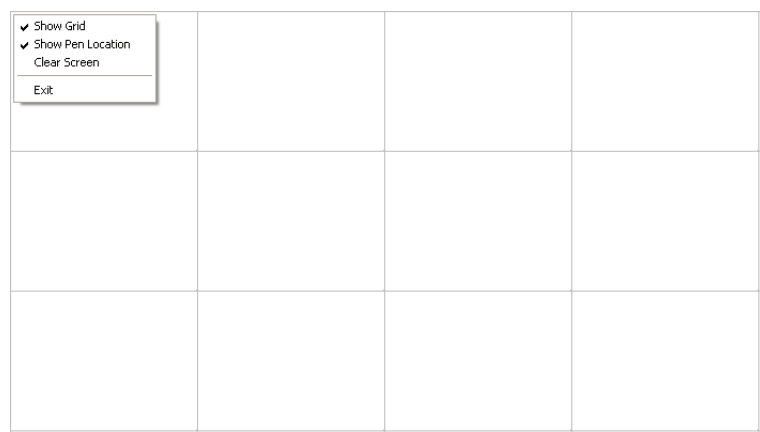


- **Advanced Calibration** – allows you to turn on (yellow color appears) /turn off the advanced calibration mode.
- **Right Button Icon** – allows you to show on desktop or system tray (yellow color appears) / hide the icon for switching buttons.
- **Screen Rotation Monitor** – allows you to align touchscreen when display is rotated by Portrait Pivot software (yellow color appears).


GPS Driver

To install the GPS driver, perform the following:

1. Insert the driver disc into the optical drive.
2. Click **Start → Run**.

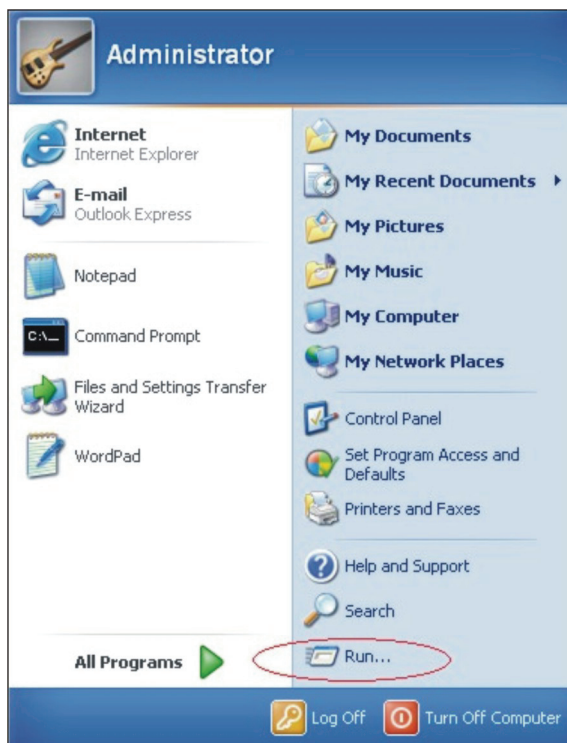

3. Enter the driver path and file name (e.g., **g:\GPS\PL-2303 Driver Installer_GPS.exe**), then click **OK**.

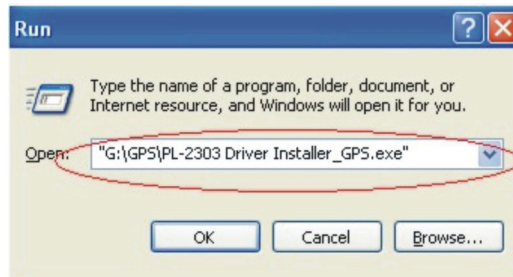


4. When the **InstallShield Wizard** screen appears, click **Next** to continue.
5. When the **Windows XP Logo Compatibility Test** screen appears, click **Continue Anyway**.
6. When the next screen appears, click **Finish** to exit the first part of the driver installation.
7. Re-boot your system for the changes to take effect.
8. After the system has finished rebooting, the **Found New Hardware Wizard** screen would appear. Select **Install the software automatically (Recommended)**, then click **Next**.
9. When the **Windows XP Logo Compatibility Test** screen appears, click **Continue Anyway**.
10. When the next screen appears, click **Finish** to complete driver installation.

Module SW Utility

For USA Only


The Module SW utility allows you to power ON/OFF either one of the following: *Bluetooth*® wireless feature / WLAN radio / 3G module (only one module opened at a time) as well as set the power ON/OFF state during system startup, by performing the following:

1. Right-click the Module SW icon on the system tray.




2. Click either **Bluetooth** or **WLAN** or **3G** to toggle between turning either one of the particular modules **ON/OFF**.

For example, upon clicking the **3G OFF** item, Module SW utility will switch the 3G module from the power OFF state to ON and power OFF the Bluetooth or WLAN module (if either one is powered ON). On the next system start-up (or restart), Module SW utility will keep the 3G module in a power ON state.




You can pass the mouse cursor over the Module SW icon on system tray to display the power state of *Bluetooth*[®] wireless feature / WLAN radio / 3G module.



For Other Regions


The Module SW utility allows you to power ON/OFF the *Bluetooth*[®] wireless feature / WLAN radio / 3G module as well as set the power ON/OFF state during system startup, by performing the following:

1. Right-click the Module SW icon on the system tray.




2. Click **Bluetooth** / **WLAN** / **3G** to toggle between turning the particular modules **ON/OFF**.

For example, upon clicking the **3G ON** item, Module SW utility will switch the 3G module from the power ON state to OFF. On the next system start-up (or restart), Module SW utility will keep the 3G module in a power OFF state.




You can pass the mouse cursor over the Module SW icon on system tray to display the power state of *Bluetooth*[®] wireless feature / WLAN radio / 3G module.




MTCCTRL Utility

The MTCCTRL utility includes the following submenus and the ignition control function.

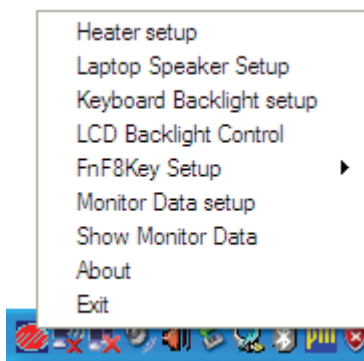

Heater Setup

Upon clicking the **Heater Setup** item the following screen appears.

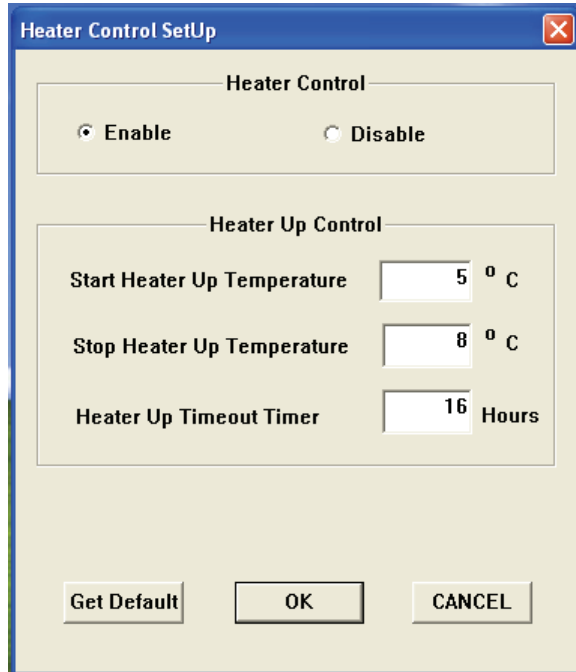

The image shows a 'Heater Control Setup' dialog box with a blue title bar and a red close button. It contains two sections: 'Heater Control' with radio buttons for 'Enable' (selected) and 'Disable'; and 'Heater Up Control' with three input fields: 'Start Heater Up Temperature' set to 5 °C, 'Stop Heater Up Temperature' set to 8 °C, and 'Heater Up Timeout Timer' set to 16 Hours. At the bottom are three buttons: 'Get Default', 'OK', and 'CANCEL'.

The HDD heater function enables a safe and reliable operating condition for the hard drive in excessively cold temperatures (-20°C). The heater is used when hard drive temperature is $\leq 5^{\circ}\text{C}$ (default). It is responsible for maintaining the hard drive temperature to near 8°C . Powering-up your computer will be delayed until the hard drive reaches a safe operating temperature range.


The following items can be configured:

- **Heater Control** – allows you to enable/disable the hard drive heater function.
- **Start Heater Up Temperature** – allows you to set the temperature (5°C default) when heater will be activated.

- **Stop Heater Up Temperature** – allows you to set the temperature (8 °C default) when heater will be deactivated.
- **Heater Up Timeout Timer** – allows you to set the runtime timer (0 ~ 16 hours, default is 16 hours). This parameter is used only when system is using battery power (not connected to AC power).

Laptop Speaker Setup

Upon clicking the **Laptop Speaker Setup** item the following screen appears.

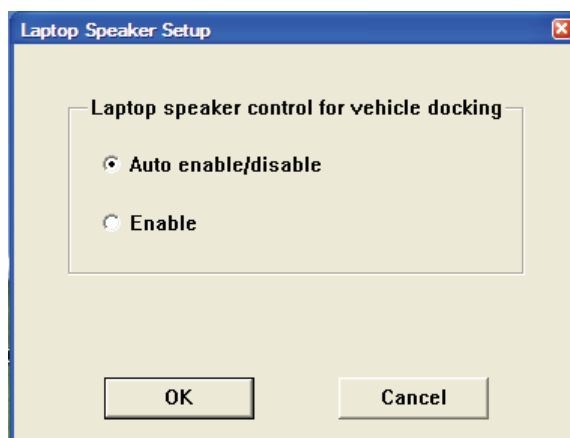

When your computer is connected to office/vehicle docking, allows you to enable/disable the speaker function.

By default when the office/vehicle docking is connected, the computer's speaker is disabled. When set at:

- **Auto Enable/Disable** –
When office docking is connected computer speaker will be disabled. Set it at **Enable** to enable computer speaker function.
When vehicle docking is connected computer speaker will be disabled while audio output is from vehicle docking speaker.


- **Enable –**

When office docking is connected audio output is still from computer speaker will be disabled.

When vehicle docking is connected audio output will be both from computer speaker and from vehicle docking speaker.

Keyboard Backlight Setup

Upon clicking the **Keyboard Backlight Setup** item the following screen appears.

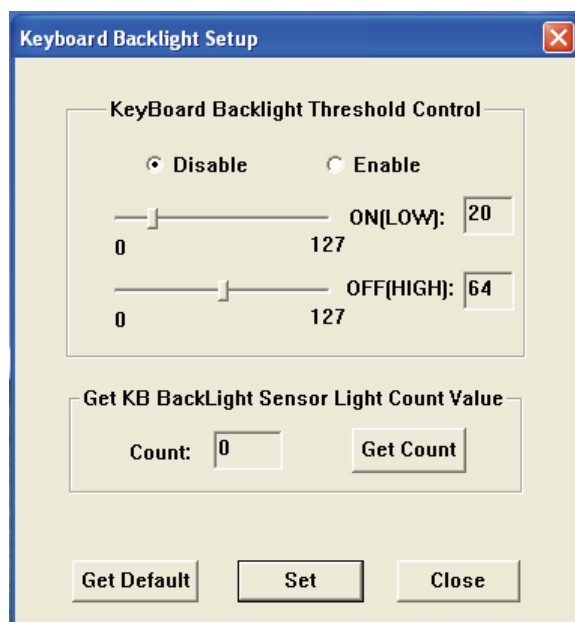

If your computer comes with the optional keyboard backlight function, allows you to configure its functionality in conjunction with the light sensor (option) located above the LCD panel.


When **Keyboard Backlight Threshold Control** item is set at **Enable**, the optional light sensor will detect the environment light count value and send it to the system's H8 controller to control keyboard backlight functionality.

- **ON (LOW)** – when the sensor light count value is less than or equal to your specified **ON (LOW)** value (**0** to **127**), the keyboard backlight will be turned ON.
- **OFF (HIGH)** – when the sensor light count value is equal or greater than your specified **OFF (HIGH)** value (**0** to **127**), the keyboard backlight will be turned OFF.
- **Count** – you can get the environment brightness count (**0** to **127**) by clicking the **Get Count** button.

Upon finishing with your settings click **Set**, then click **Close** to exit.

LCD Backlight Control

Upon clicking the **LCD Backlight Control** item the following screen appears.

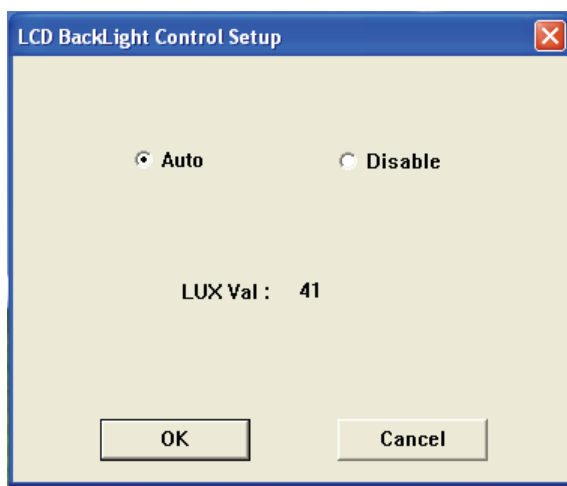


If your computer comes with the optional LCD backlight sensor and this item is set at **Auto**, MTCCTRL utility will read (per 3 seconds) the environment brightness count and show the value on **LUX Val**.

If the environment brightness count value is too big then your computer will automatically adjust the LCD backlight to compensate for it.

Fn+F8 Key Setup

The **Fn+F8 Key Setup** item contains the following sub-items.

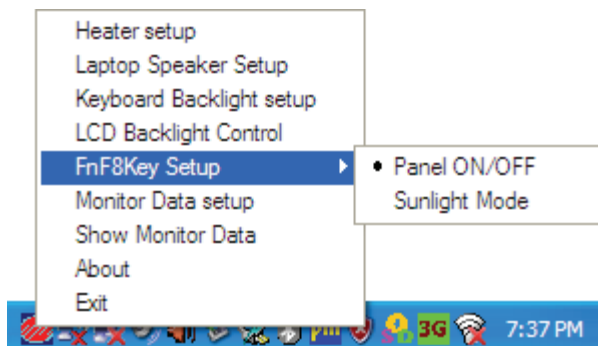


- **Panel ON/OFF** – when this item is selected, upon pressing **Fn + F8** hot key combination LCD screen will toggle ON/OFF.
- **Sunlight Mode** – when this item is selected, upon pressing **Fn + F8** hot key combination LCD screen will toggle between sunlight-readable mode or normal mode.

IMPORTANT: To prevent burns to your fingers if using the computer (especially in Tablet Mode) with sunlight-readable mode turned on, do wear gloves when touching the top portion of the LCD display as it may be hot to the touch.

Monitor Data Setup


Upon clicking the **Monitor Data Setup** item the following screen appears.

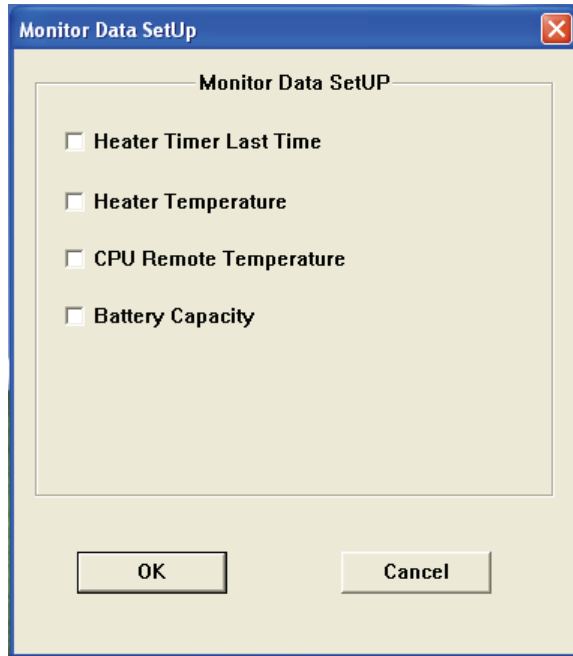

Upon checking on any of the four items (all items can be selected), the next item **Show Monitor Data** will display the details of the selected sub-items.

Show Monitor Data

Upon clicking the **Show Monitor Data** item the following screen appears.

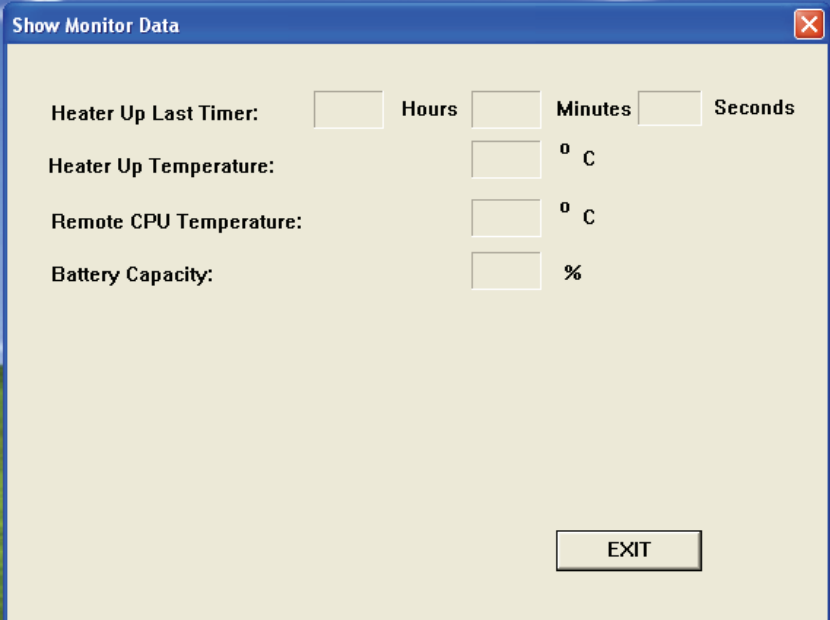

The 'Show Monitor Data' dialog box displays the following fields:


Heater Up Last Timer:	<input type="text"/>	Hours	<input type="text"/>	Minutes	<input type="text"/>	Seconds
Heater Up Temperature:	<input type="text"/>	° C				
Remote CPU Temperature:	<input type="text"/>	° C				
Battery Capacity:	<input type="text"/>	%				

EXIT

Only the details of the items selected on the previous item **Monitor Data Setup** will be shown onscreen.

About

Upon clicking the **About** item the following screen appears showing the MTCCTRL utility version number.

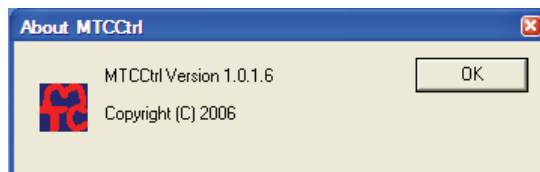


Exit

Upon clicking the **Exit** item the MTCCTRL utility will exit and the MTCCTRL system tray icon will disappear.

Ignition Control Function

The MTCCTRL utility includes automatic sensing of the vehicle ignition status when computer is connected to the vehicle docking. This feature sets the power ON/OFF control of the system via the vehicle ignition switch or power button.

- Power ON – the computer can be powered ON upon turning ON the vehicle's ignition switch or upon pressing the power button.
- Power OFF – when vehicle ignition switch is turned OFF the following screen appears informing the user that computer will shutdown after 15 seconds.

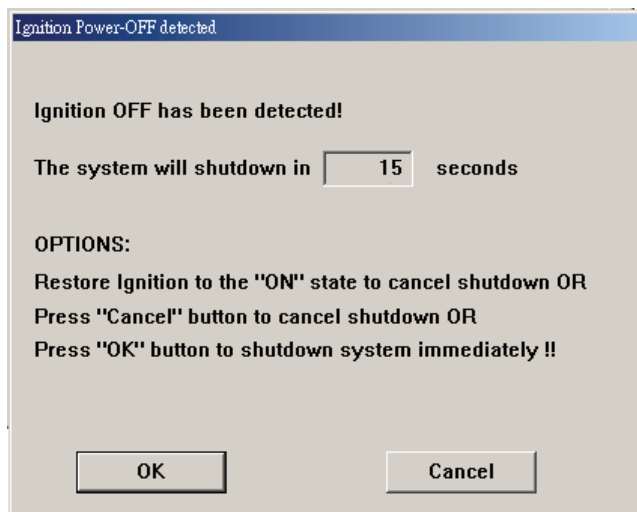












The ignition power-OFF notification can be cancelled by restarting the vehicle ignition or pressing the **Cancel** button before the expiration of the ignition shutdown timer.















If you press the **OK** button computer will shutdown immediately.

Using the OSD

With the OSD driver installed, it will be activated every time Windows starts up.

A graphic display will appear on the screen to indicate the current status when you perform a hot key operation (as listed next). The OSD disappears after a few seconds.

Hot Key Operation	OSD Description	
	The OSD appears to indicate that the wireless LAN radio is	
		
	ON or OFF.	
 	The OSD appears to indicate the volume level.	
		
	up to and vice versa.	
 	The OSD appears to show the LCD backlight brightness level.	
		
	up to and vice versa.	

Hot Key Operation	OSD Description
 	<p>The OSD appears to indicate that the system sound output is off (mute).</p> 
 	<p>The OSD appears to indicate that the LCD is</p> <div data-bbox="322 496 527 699">  </div> <p>ON or</p> <div data-bbox="602 496 807 699">  </div> <p>OFF, or</p> <p>switched to sunlight-readable mode is</p> <div data-bbox="322 730 527 935">  </div> <p>ON or</p> <div data-bbox="602 730 807 935">  </div> <p>OFF.</p>
 	<p>The OSD appears to indicate the display output. Whether it is</p> <div data-bbox="322 975 527 1177">  </div> <p>LCD only,</p> <div data-bbox="647 975 852 1177">  </div> <p>CRT only, or</p> <div data-bbox="322 1185 527 1385">  </div> <p>LCD and CRT.</p>

SATA AHCI Driver

Prepare and connect a USB optical drive and a USB floppy drive to your system.

There are two methods to install this driver.

- Follow the steps on the next section “Pre-installation Using the F6 Method” if Windows XP or Windows 2000 operating system is not yet installed on your computer.
- Follow the steps on the section “Installation in Windows Operating System Method” if Windows XP or Windows 2000 operating system is already installed on your computer.

WARNING: Make sure to disable the “SATA AHCI Configuration” item under “Advanced” menu of your BIOS Setup (see Chapter 5) before installing this driver. If not, your system may not respond or it will display a blue screen.


Pre-installation Using the F6 Method

1. Insert an empty floppy disk into your floppy drive.
2. Insert the included driver disc to your optical drive and locate the folder **\Drivers\Chipset\Intel\IAA\DOS\F6 Install Floppy**.
3. Run **F6flpy32** to create the AHCI driver on your floppy disk.
4. Remove the driver disc from your optical drive and insert the Windows XP or Windows 2000 operating system installer disc.
5. Remove the created AHCI driver disk from the floppy drive.
6. Restart your system and press **F2** to enter BIOS Setup.
7. Enable the “SATA AHCI Configuration” item and select “Enhanced” on the SATA mode item under “Advanced” menu of your BIOS Setup.
8. Change the boot priority order to “USB CDROM” item under the Boot menu of your BIOS Setup.
9. Press **F10** to save your BIOS settings and exit.


10. Restart your computer.
11. During Windows setup, you will see a prompt “**Press <F6> to install a third-party SCSI or RAID driver.**” Press **F6**, it may appear as if nothing happened as a dialog box will not appear and you will not immediately see a prompt.
12. Later, you will be prompted to select “S” for “Specify Additional Device,” press **S**.
13. When prompted, insert the created AHCI driver floppy disk in to the floppy drive and press **Enter**.
14. Select "Intel® 82801 GBM SATA AHCI Controller (Mobile ICH7M)" and press **Enter**.
15. Continue the installation and press **Enter** when prompted. Leave the floppy disk in the drive until the next reboot. The files may need to be copied from the disk again during setup.
16. Follow the onscreen instructions to complete the installation of Windows operating system.

Installation in Windows Operating System Method


1. Insert the included driver disc into the optical drive.
2. From the **Start** menu:
for Windows 2000, select **Settings** → **Control Panel**.
for Windows XP, select **Control Panel**.

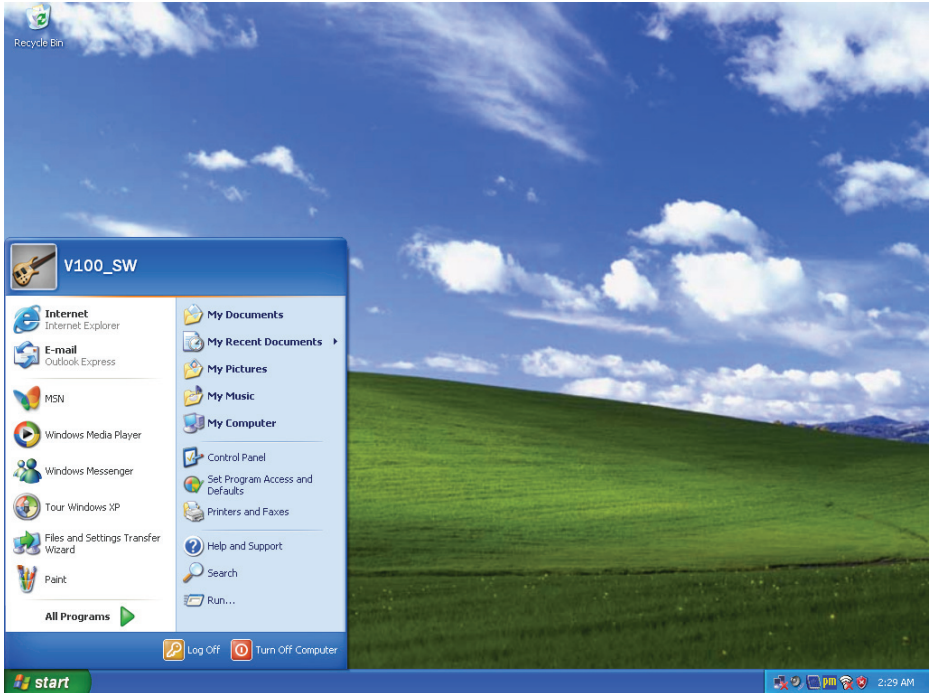


3. Double-click the **System** icon.

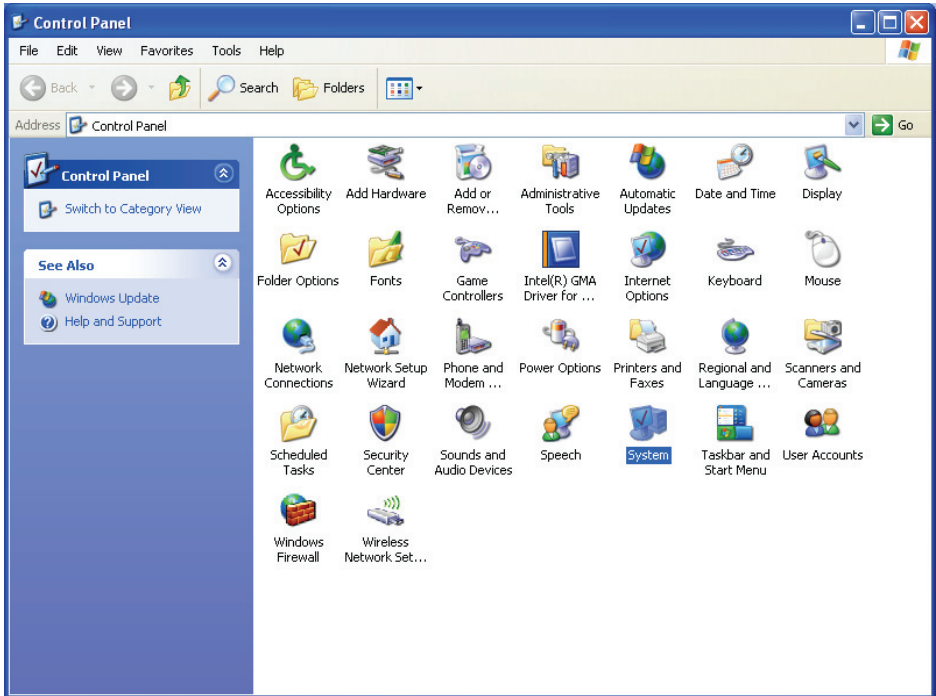


4. Select the **Hardware** tab in Windows XP or, select the **Settings** tab in Windows 2000. Then click the **Device Manager** button.

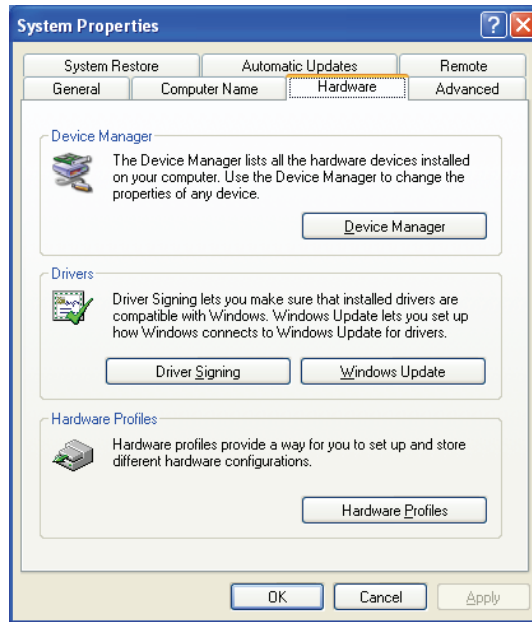


5. When the **Device Manager** window appears, expand the **IDE ATA/ATAPI controllers** item, then right-click on **Intel® 82801 GBM/GHM (ICH7-M Family) Serial ATA Storage Controller - 27C4** item and select **Update Driver**.

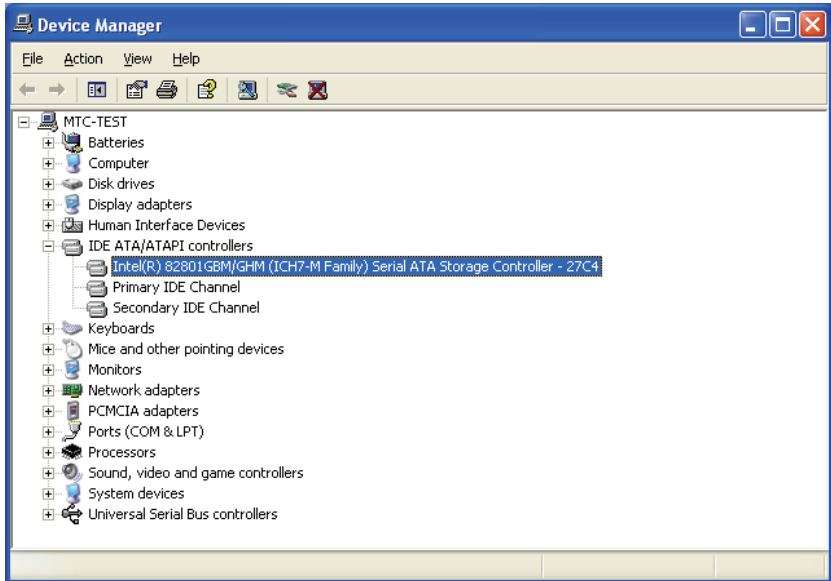


6. The **Welcome to the Hardware Update Wizard** window appears. Click **No, not this time** and then click **Next**.

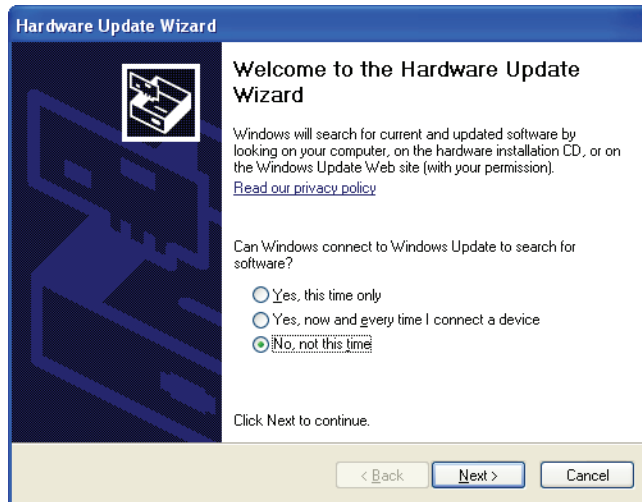


7. Select **Install from a list or specific location (Advanced)** and then click **Next**.

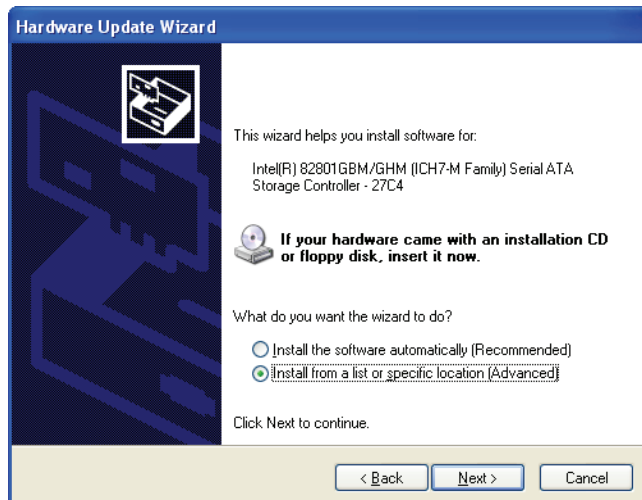


8. Select **Don't search. I will choose the driver to install.** and then click **Next**.

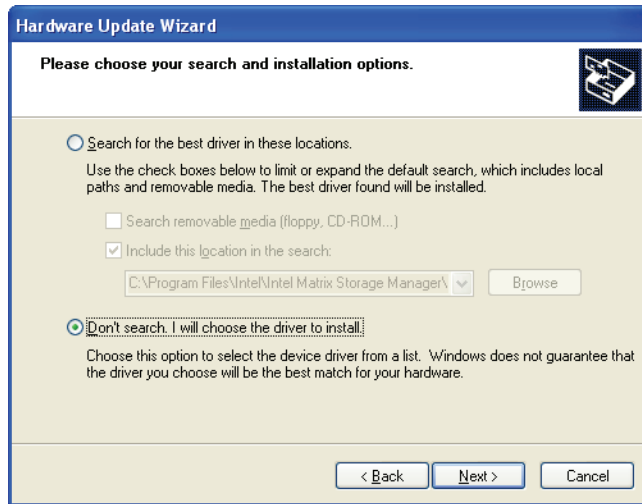


9. Click the **Have Disk...** button and the **Install From Disk** window appears.

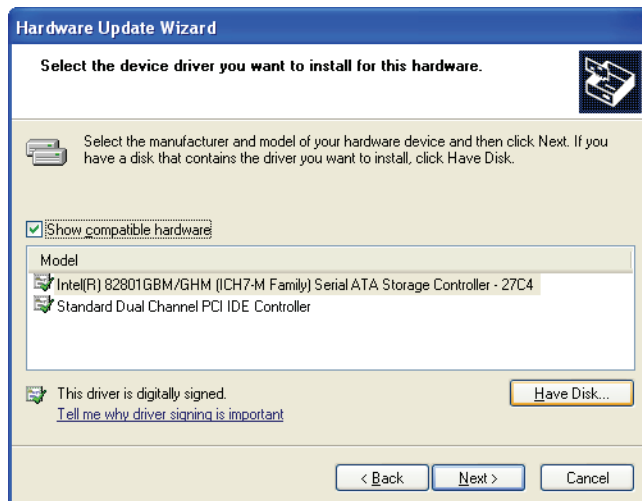


- Click **Browse...** and locate the **iaahci.inf** file under the folder **\Drivers\Chipset\Intel\IAA\WIN\Driver**, then click **OK**.

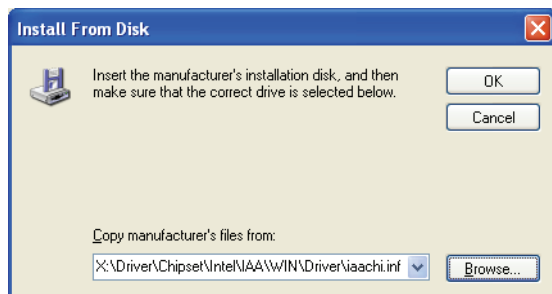


- The **Hardware Update Wizard** window appears. Select **Intel® 82801GBM SATA AHCI Controller** item and then click **Next**.

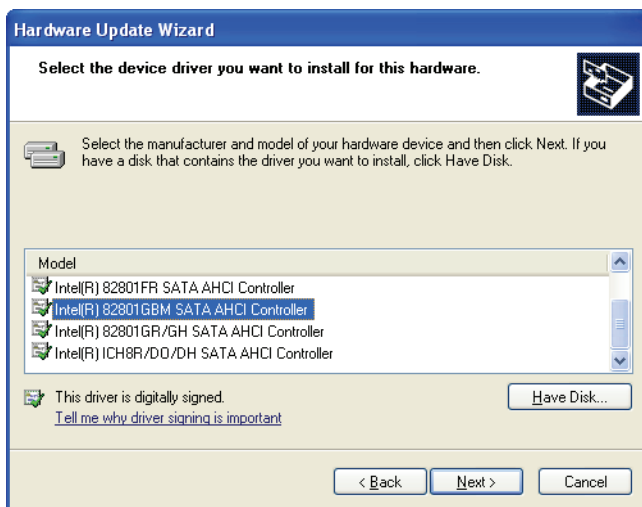


12. The **Update Driver Warning** window appears, click **Yes**.

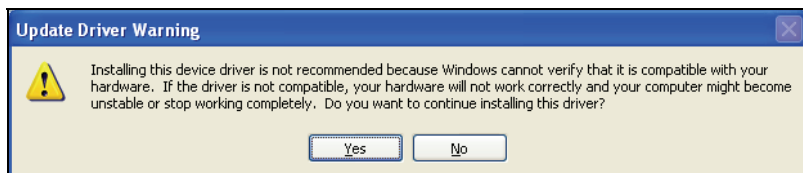

13. The **Completing the Hardware Update Wizard** window appears, click **Finish**.

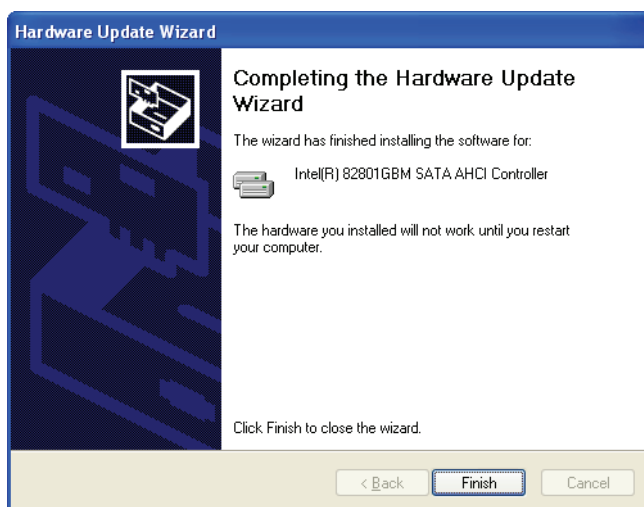

14. Click **Yes** to restart your computer.

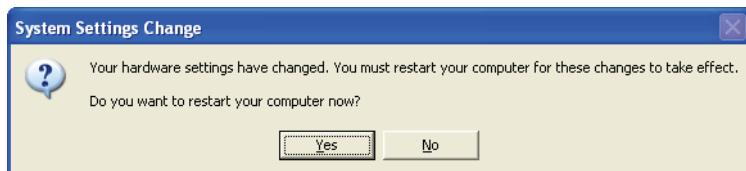

15. Enable the “SATA AHCI Configuration” item and select “Enhanced” on the SATA mode item under “Advanced” menu of your BIOS Setup.
16. Press **F10** to save your BIOS settings and exit.
17. Restart your computer.

Caring for the Computer

Taking good care of your computer will ensure a trouble-free operation and reduce the risk of damage to your computer.

This chapter gives you guidelines covering these areas of maintenance:

- How to protect the computer
- What to note when using and storing the computer
- How to clean the computer
- What to note when using the battery pack
- What to note when traveling with the computer


Protecting the Computer

To safeguard the integrity of your computer data as well as the computer itself, you can protect the computer in several ways as described in this section.

Using the Cable Lock

You can use a Kensington-type cable lock to protect your computer against theft. The cable lock is available in most computer stores.

To use the lock, loop the lock cable around a stationary object such as a table. Insert the lock to the Kensington lock hole and turn the key to secure the lock. Store the key in a safe place.

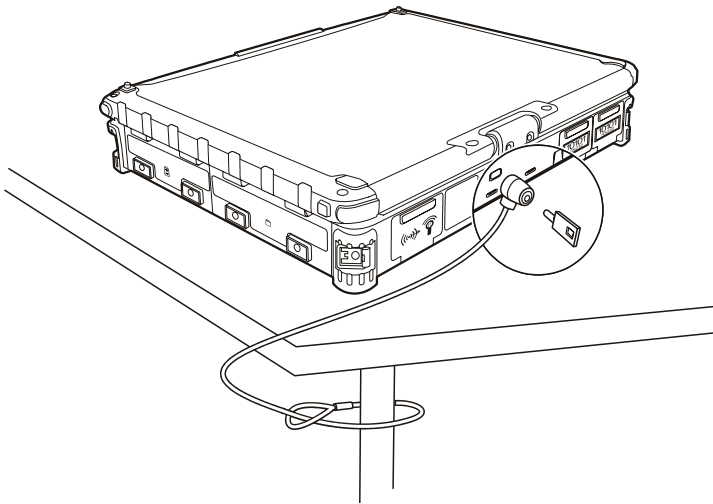

Using an Anti-Virus Strategy

New viruses are always being developed nowadays and they are attacking computers even more easily with emails so commonly used worldwide. You can install a virus-detecting program to monitor potential viruses that could damage your files.

Taking Care of the Computer

Location Guidelines

- Use the computer where the temperature is between 0 °C (32 °F) and 55 °C (131 °F).
- Avoid placing the computer in a location subject to high humidity, extreme temperatures, mechanical vibration, direct sunlight, or heavy dust.
- Do not cover or block any ventilation openings on the computer. For example, do not place the computer on a bed, sofa, rug, or other similar surface. Otherwise, overheating may occur that results in damage to the computer.
- Keep the computer at least 13 cm (5 inches) away from electrical appliances that can generate a strong magnetic field such as a TV, refrigerator, motor, or a large audio speaker.
- Do not move the computer abruptly from a cold to a warm place. A temperature difference of more than 10 °C (18 °F) will cause condensation inside the unit, which may damage the storage media.
- Do not place the computer on an unsteady surface.

General Guidelines

- Do not place heavy objects on top of the computer when it is closed as this may damage the display.
- The screen surface is easily scratched. Do not use paper towels to clean the display. Avoid touching it with your fingers, pen, or pencil.
- To maximize the life of the backlight in the display, allow the backlight to automatically turn off as a result of power management. Avoid using a screen saver or other software that prevents the power management from working.

Cleaning Guidelines

- Never clean the computer with its power on.
- Use a soft cloth moistened with water or a non-alkaline detergent to wipe the exterior of the computer.
- Gently wipe the display with a soft, lint-free cloth. Do not use alcohol or detergent on the display.
- Dust or grease on the touchpad can affect its sensitivity. Clean the pad by using adhesive tape to remove the dust and grease on its surface.

Battery Pack Guidelines

- Recharge the battery pack when it is nearly discharged. When recharging, make sure that the battery pack is fully charged. Doing so may avoid harm to the battery pack.
- Operate the computer with the battery pack installed even when using external power. This ensures that the battery is fully charged.
- If you will not be using the computer for a long period of time (more than two weeks), remove the battery pack from the computer.
- If you remove the battery pack, make sure that the battery terminals do not contact any conductors such as metal objects or water. Otherwise, the battery may become unusable as a result of a short circuit.
- If you need to store the battery pack, store it in a cool, dry place. Never allow the temperature to exceed 60 °C (140 °F).
- Do not leave the battery pack in storage for more than 6 months without recharging it.

When Traveling

- Before traveling with your computer, make a backup of your hard disk data into flash disks or other storage devices. As an added precaution, bring along an extra copy of your important data.
- Make sure that the battery pack is fully charged.
- Make sure that the computer is turned off and the top cover is securely closed.
- Do not leave objects in between the keyboard and closed display.
- Disconnect the AC adapter from the computer and take it with you. Use the AC adapter as the power source and as a battery-charger.
- Hand-carry the computer. Do not check it in as luggage.
- If you need to leave the computer in the car, put it in the trunk of the car to avoid exposing the computer to excessive heat.
- When going through airport security, it is recommended that you send the computer and flash disks through the X-ray machine (the device you set your bags on). Avoid the magnetic detector (the device you walk through) or the magnetic wand (the handheld device used by security personnel).
- If you plan to travel abroad with your computer, consult your dealer for the appropriate AC power cord for use in your country of destination.

Troubleshooting

Computer problems can be caused by hardware, software, or both. When you encounter any problem, it might be a typical problem that can easily be solved.

This chapter tells you what actions to take when solving common computer problems. It is divided into three sections:

- Preliminary checklist
- Solving common problems
- Resetting the computer

Preliminary Checklist

Here are helpful hints to follow before you take further actions when you encounter any problem:

- Try to isolate which part of the computer is causing the problem.
- Make sure that you turn on all peripheral devices before turning on the computer.
- If an external device has a problem, make sure that the cable connections are correct and secure.
- Make sure that the configuration information is properly set in the BIOS Setup program.
- Make sure that all the device drivers are correctly installed.
- Make notes of your observations. Are there any messages on the screen? Do any indicators light? Do you hear any beeps? Detailed descriptions are useful to the service personnel when you need to consult one for assistance.

If any problem persists after you follow the instructions in this chapter, contact an authorized dealer for help.

Solving Common Problems

For easy reference, the problems are divided into these categories.

Problem Type	Go to
Battery Problems	P. 8-4
Bluetooth Problems	P. 8-4
Display Problems	P. 8-5
Hardware Device Problems	P. 8-6
Hard Disk Drive Problems	P. 8-6
Keyboard, Mouse, and Touchpad Problems	P. 8-7
LAN Problems	P. 8-7
WLAN Problems	P. 8-8
Modem Problems	P. 8-8
PC Card Problems	P. 8-10
Power Management Problems	P. 8-10
Software Problems	P. 8-11
Sound Problems	P. 8-11
Startup Problems	P. 8-12
Other Problems	P. 8-12

Battery Problems

The battery does not charge (Battery Charge indicator does not light yellow).

- Make sure that the AC adapter is properly connected.
- Make sure that the battery is not too hot or cold. Allow time for the battery pack to return to room temperature.
- Make sure that the battery pack is installed correctly.
- Make sure that the battery terminals are clean.

The operating time of a fully charged battery becomes shorter.

- If you often partially recharge and discharge, the battery might not be charged to its full potential. Initialize the battery to solve the problem. (See “Initializing the Battery Pack” in Chapter 3 for instructions.)

The battery operating time indicated by the battery meter does not match the actual operating time.

- The actual operating time can be different from the estimated time, depending on how you are using the computer. If the actual operating time is much less than the estimated time, initialize the battery. (See “Initializing the Battery Pack” in Chapter 3 for instructions.)

Bluetooth Problems

I cannot connect to another Bluetooth-enabled device.

- Make sure that the Bluetooth card is correctly installed.
- Make sure that the Bluetooth driver is correctly installed.
- Make sure that both devices have activated Bluetooth.
- Make sure that the distance between the two devices are not over 10 meters or that there are no walls or other obstructions between the devices.
- Make sure that the other device is not in “Hidden” mode.

- Make sure that both devices are compatible.

Display Problems

Nothing appears on the screen.

- During operation, the screen may automatically turn off as a result of power management. Press any key to see if the screen comes back.
- The brightness level might be too low. Increase brightness by pressing the **Fn+F6** hot key.
- The display output might be set to an external device. To switch the display back to the LCD, press the **Fn+F9** hot key or change the display through the settings in **Display Properties**.

The characters on the screen are dim.

- Adjust the brightness and/or contrast.

Bad dots appear on the display at all times.

- A small number of missing, discolored, or bright dots on the screen are an intrinsic characteristic of TFT LCD technology. It is not regarded as a LCD defect.

Resolution cannot be adjusted to desired setting.

- Make sure that the device driver is installed correctly.

The external monitor displays nothing.

- Make sure that the monitor is turned on.
- Make sure that the monitor's signal cable is properly connected.
- Switch the display to the monitor by pressing the **Fn+F9** hot key or change the display through the settings in **Display Properties**.

Simultaneous display/multi-display does not work.

- Make sure that you turn on the external monitor before turning on the computer.

- Press the **Fn+F9** hot key to toggle through the display options or change the settings in **Display Properties** in Windows.

Hardware Device Problems

The computer does not recognize a newly installed device.

- The device may not be correctly configured in the BIOS Setup program. Run the BIOS Setup program to identify the new type.
- Make sure if any device driver needs to be installed. (Refer to the documentation that came with the device.)
- Make sure if the device needs any jumper or switch settings. (Refer to the documentation that came with the device.)
- Check the cables or power cords for correct connections.
- For an external device that has its own power switch, make sure that the power is turned on.

Hard Disk Drive Problems

The hard disk drive error message appears on the screen.

- The hard disk drive has defects. Ask your dealer for help.

The hard disk drive operations seem slow.

- The data files stored on the hard disk drive may be fragmented. Use a tool such as Window's **Disk Defragmenter** to defragment the files.

The hard disk drive in-use indicator glows without blinking.


- The data files stored on the hard disk drive may be fragmented. Use a tool such as Window's **Disk Defragmenter** to defragment the files.

Keyboard, Mouse, and Touchpad Problems

The keyboard does not respond.

- Try connecting an external keyboard. If it works, contact an authorized dealer, as the internal keyboard cable might be loose.

The numeric keypad is disabled.

- Make sure that the **Num Lock** is switched on. (Check if the Num Lock Indicator  glows or not.)

The external keyboard does not work.

- Make sure that the keyboard cable is properly connected.

The USB mouse does not work.

- Make sure that the mouse cable is properly connected.

The touchpad does not work, or the pointer is difficult to control with the touchpad.

- Make sure that the device driver is correctly installed.
- Make sure that the touchpad is clean.

LAN Problems

I cannot access the network.

- Make sure that the device driver is correctly installed.
- Make sure that the LAN cable is properly connected to the RJ-45 connector and the network hub.
- Make sure that the network configuration is appropriate.
- Make sure that the user name or password is correct.

WLAN Problems

I cannot use the WLAN feature.

- Make sure that the mini PCI-E WLAN card is correctly installed.
- Make sure that the necessary driver(s) is correctly installed.
- Make sure that the WLAN feature is turned on.

Transmission quality is poor.

- Your computer may be in an out-of-range situation. Move your computer closer to the Access Point or another WLAN device it is associated with.
- Check if there is high interference around the environment and solve the problem as described next.

Radio interference exists.

- Move your computer away from the device causing the radio interference such as microwave oven and large metal objects.
- Plug your computer into an outlet on a different branch circuit from that used by the affecting device.
- Consult your dealer or an experienced radio technician for help.

I cannot connect to another WLAN device.

- Make sure that the WLAN feature is turned on.
- Make sure that the SSID setting is the same for every WLAN device in the network.
- Your computer is not recognizing changes. Restart the computer.
- Make sure that the IP address or subnet mask setting is correct.

I cannot communicate with the computer in the network when Infrastructure mode is configured.

- Make sure that the Access Point your computer is associated with is powered on and all the LEDs are working properly.

- If the operating radio channel is in poor quality, change the Access Point and all the wireless station(s) within the BSSID to another radio channel.
- Your computer may be in an out-of-range situation. Move your computer closer to the Access Point it is associated with.
- Make sure that your computer is configured with the same security option (encryption) to the Access Point.
- Use the Web Manager/Telnet of the Access Point to check whether it is connected to the network.
- Reconfigure and reset the Access Point.

I cannot access the network.

- Make sure that the necessary driver(s) is correctly installed.
- Make sure that the network configuration is appropriate.
- Make sure that the user name or password is correct.
- You have moved out of range of the network.
- Turn off power management.

Modem Problems

The modem does not work.

- Make sure that the device driver is correctly installed.
- Make sure that the telephone line is properly connected.
- Make sure that the COM port in the communication software is correctly set.
- Turn off power management.

PC Card Problems

The PC card does not work.

- Make sure that the PC card is correctly seated.
- If the card requires an IRQ (Interrupt ReQuest), make sure that there is one available.

The PC card stops communicating properly.

- The application may have been reset when the computer is turned off or in Standby mode. Exit and restart the application.

Power Management Problems

The computer does not enter Standby or Hibernation mode automatically.

- If you have a connection to another computer, the computer does not enter Standby or Hibernation mode if the connection is actively in use.
- Make sure that the Standby or Hibernation time-out is enabled.

The computer does not enter Standby or Hibernation mode immediately.

- If the computer is performing an operation, it normally waits for the operation to finish.

The computer does not resume from Standby or Hibernation mode.

- The computer automatically enters Standby or Hibernation mode when the battery pack is empty. Do any one of the following:
 - Connect the AC adapter to the computer.
 - Replace the empty battery pack with a fully charged one.

The computer does not enter Hibernation mode with the Fn+F10 hot keys.

- Make sure that the Hibernation function is specified for the sleep button.

- You might be using a PC card that prevents the computer from entering Hibernation mode. To enter the mode, stop the communication program and then remove the card or stop the card.

Software Problems

An application program does not work correctly.

- Make sure that the software is correctly installed.
- If an error message appears on the screen, consult the software program's documentation for further information.
- If you are sure the operation has stop, reset the computer. (See "Resetting the Computer" later in this chapter.)

Sound Problems

No sound is produced.

- Make sure that the volume control is not set too low.
- Make sure that the device driver is correctly installed.
- Make sure that the computer is not in Standby mode.
- If using an external speaker, make sure that the speaker is properly connected.

Distorted sound is produced.

- Make sure that the volume control is not set too high or too low. In most cases, a high setting can cause the audio electronics to distort the sound.

The sound system does not record.

- Adjust the playback or recording sound levels.

The external microphone or audio device does not work.

- Make sure that the microphone is connected to the proper connector on the computer.

- Make sure that your computer is equipped with the driver needed.
- Click the speaker symbol on the taskbar and check the Windows volume control.
- Check the volume control of your computer.

Startup Problems

When you turn on the computer, it does not respond and the Power Indicator does not light green.

- If you are using an external AC power, make sure that the AC adapter is correctly and securely connected. If so, make sure that the electrical outlet works properly.
- If you are using the battery power, make sure that the battery is not discharged.

When you turn on the computer, it stops after POST.

- Restart your computer.

Other Problems

The date/time is incorrect.


- Correct the date and time via the operating system or BIOS Setup program.
- After you have performed everything as described above and still have the incorrect date and time every time you turn on the computer, the RTC (Real-Time Clock) battery is at the end of its life. Call an authorized dealer to replace the RTC battery.

Resetting the Computer

You may have to reset (reboot) your computer on some occasions when an error occurs and the program you are using hangs up.

If the computer operation seems to hang up, first wait. It is possible that the computer is processing data. Periodically check the hard disk drive in-use indicator, if it flashes irregularly, the program may be accessing data and preventing you from using the keyboard. If you are sure the operation has stopped and you cannot use the “restart” function of the operating system, reset the computer.

Reset the computer by any one of these methods:

- Press **Ctrl+Alt+Del** on your built-in keyboard or press the security button .
- If the above action does not work, turn off the computer. Wait for at least five seconds and turn it on again.

| CAUTION: Resetting will cause any unsaved data to be lost.

Specifications

NOTE: Specifications are subject to change without any prior notice.

Parts		Specifications
CPU		Intel® Core™ Duo ULV 1.2 GHz processor 533 MHz FSB (Front Side Bus)
Cache Memory		2 MB L2 cache
Chipset	NorthBridge	Intel® 945GMS
	SouthBridge	ICH7-M
RAM (system)		512 MB DDR2 533 MHz (1 GB option)
Display	Panel	10.4-inch wide TFT LCD, resolution up to 1024×768 XGA 12.1-inch wide TFT LCD, resolution up to 1280×800 WXGA (option) Touchscreen function or Active Digitizer feature (option) NOTE: Both Touchscreen and Active Digitizer feature cannot exist at the same time. Sunlight-readable (option)
	Video controller	Intel® GMA 950
	Video port	VGA Replaced with serial port (RS-232) – option Replaced with serial port (RS-422) – option
Audio	Features	Azalia interface 32-bits audio digital controller
	Speaker	3 watt × 1
	Ports	Two audio ports for Line-out / Mic-in (Line-in)
Keyboard		Standard keys with numeric pad keys, 12 function keys, special Fn (Function) key and Windows keys Water-proof membrane, water-proof rubber + backlight (option)
Pointing device		PS/2-compatible touchpad with 2 buttons, capacitance-type
Hard disk drive		SATA interface, 1.5 GHz, 5400 rpm support HDD heater for low temperature –20 °C solution (option)
PCMCIA		Type II × 2 Type II × 1 and Smart Card Reader (option)

Parts		Specifications
Card Reader (option)		Secure Digital (SD)
I/O ports		Two USB ports (USB 2.0 support), serial ports × 2 (RS-232), RJ-45 port, RJ-11 port
Modem		56 Kbps, ITU V.92 MDC internal fax modem
LAN		10/100/1000Base-T Ethernet
Wireless LAN (option)		Intel® PRO 3945a/b/g
Bluetooth (option)		Specification 2.0 module
Camera (option)		Integrated 1.3 M pixel NOTE: Both camera and GPS feature cannot exist at the same time.
GPS (option)		Integrated NOTE: Both GPS and camera feature cannot exist at the same time.
3G (option)		CDMA 2000 1× EVDO (Sierra 5720) WCDMA/HSDPA (UMTS) NOTE: Both type of 3G options cannot exist at the same time.
Security		Kensington lock TPM 1.2 (availability may vary) – option Smart Card Reader (integrated) will occupy one Type II PCMCIA slot – option
Docking		Engage with vehicle docking RF switch for WWAN and WLAN pass-through (option)
Strap		Grid-type
Accessories (option)		Carrying bag, battery pack, cross-type strap, external battery charger, vehicle mount (no docking connector needed), vehicle docking (need to combine with docking connector), car adapter
Operating System		Microsoft® Windows® XP Professional (with Touchscreen display) Microsoft® Windows® XP Tablet PC Edition 2005 (with Active Digitizer display panel)
Power	AC adapter	Universal AC adapter 90 W; input: 100~240 V, 50/60 Hz
	Battery	Li-ion smart battery 5200 mAh / 11.1 V Li-ion smart battery 7800 mAh / 11.1 V (option)
Dimension (W×D×H)		285×222×49 mm (11.2×8.7×1.9 inch) for 10.4-inch wide TFT LCD 311×222×49 mm (12.2×8.7×1.9 inch) for 12.1-inch wide TFT LCD
Weight		2.2 kg (4.9 lb)
Environment	Temperature	Operating: 0 °C (32 °F) to 55 °C (131 °F) –20 °C (4 °F) to 55 °C (131 °F) – low temperature option Storage: –40 °C (–40 °F) to 70 °C (158 °F)
	Humidity	According to IEC 68-2-30 / MIL-STD-810F, Method 507.4 45 % to 95 % relative, non-condensing
	Altitude	According to IEC 68-2-13 / MIL-STD-810F, Method 500.4 Operating: 15,000 ft Non-operating: 40,000 ft Attitude change rate: 2,000 ft/min
Regulation		FCC, UL, CUL, TUV, CE, CB, CCC, PSE, WHQL, BSMI, RoHS, E-Mark

Regulatory Information

This appendix provides regulatory statements and safety notices on your computer.

NOTE: Marking labels located on the exterior of your computer indicate the regulations that your model complies with. Please check the marking labels and refer to the corresponding statements in this appendix. Some notices apply to specific models only.

On the Use of the System

Class B Regulations

USA

Federal Communications Commission Radio Frequency Interference Statement

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

Please note:

The use of a non-shielded interface cable with this equipment is prohibited.

Canada

Canadian Department of Communications Radio Interference Regulations Class B Compliance Notice

This Class B digital apparatus meets all requirements of the Canada Interference-Causing equipment regulations.

Cet appareil numérique de Classe B respecte toutes les exigences du Règlement Canadien sur le matériel brouilleur.

This digital apparatus does not exceed the Class B limits for radio noise emissions from digital apparatus set out in the Radio Interference Regulations of the Canadian Department of Communications.

Le présent appareil numérique n'émet pas de bruits radioélectriques dépassant les limites applicables aux appareils numériques de la classe B prescrites dans le Règlement sur le brouillage radioélectrique édicté par le ministère des Communications du Canada.

Safety Notices

About the Battery

Caution Texts Concerning Lithium Batteries

DANISH

ADVARSEL! Lithiumbatteri – Eksplosionsfare ved fejlagtig håndtering. Udskiftning må kun ske med batteri af samme fabrikat og type. Levér det brugte batteri tilbage til leverandøren.

NORWEGIAN

ADVARSEL: Eksplosjonsfare ved feilaktig skifte av batteri. Benytt samme batteritype eller en tilsvarende type anbefalt av apparatfabrikanten. Brukte batterier kasseres i henhold til fabrikantens instruksjoner.

SWEDISH

VARNING: Explosionsfara vid felaktigt batteribyte. Använd samma batterityp eller en ekvivalent typ som rekommenderas av apparattillverkaren. Kassera använt batteri enligt fabrikantens instruktion.

FINNISH

VAROITUS: Paristo voi räjähtää, jos se on virheellisesti asennettu. Vaihda paristo ainoastaan valmistajan suosittelemaan tyyppiin. Hävitä käytetty paristo valmistajan ohjeiden mukaisesti.

ENGLISH

CAUTION: Danger of explosion if battery is incorrectly replaced. Replace only with the same or equivalent type recommended by the equipment manufacturer. Discard used batteries according to manufacturer's instructions.

DEUTSCH

VORSICHT: Explosionsgefahr bei unsachgemäßem Austausch der Batterie. Ersatz nur durch denselben oder einen vom Hersteller empfohlenen gleich-wertigen Typ.

Entsorgung gebrauchter Batterien nach Angaben des Herstellers.

FRENCH

ATTENTION: Il y a danger d'explosion s'il y a remplacement incorrect de la batterie.

Remplacer uniquement avec une batterie du même type ou d'un type équivalent

recommandé par le constructeur. Mettre au rebut les batteries usagées conformément aux instructions du fabricant.

Attention (for USA Users)

The product that you have purchased contains a rechargeable battery. The battery is recyclable. At the end of its useful life, under various state and local laws, it may be illegal to dispose of this battery into the municipal waste stream. Check with your local solid waste officials for details in your area for recycling options or proper disposal.

About the AC Adapter

- Use only the AC adapter supplied with your computer. Use of another type of AC adapter will result in malfunction and/or danger.
- Do not use the adapter in a high moisture environment. Never touch the adapter when your hands or feet are wet.
- Allow adequate ventilation around the adapter when using it to operate the device or charge the battery. Do not cover the AC adapter with paper or other objects that will reduce cooling. Do not use the AC adapter while it is inside a carrying case.
- Connect the adapter to a proper power source. The voltage requirements are found on the product case and/or packaging.
- Do not use the adapter if the cord becomes damaged.
- Do not attempt to service the unit. There are no serviceable parts inside. Replace the unit if it is damaged or exposed to excess moisture.

About the Modem

Caution

- Never install telephone wiring during a lightning storm.
- Never install telephone jacks in wet locations unless the jack is specifically designed for wet locations.
- Never touch non-insulated telephone wires or terminals unless the telephone line has been disconnected at the network interface.
- Use caution when installing or modifying telephone lines.
- Avoid using the telephone function (other than a cordless type) during an electrical storm. There may be a remote risk of electric shock from lightning.
- Do not use the telephone function to report a gas leak in the vicinity of the leak.
- Do not use this product near water, for example near a bathtub, wash bowl, kitchen sink or laundry tub, in a wet basement or near a swimming pool.

Caution (for USA Users)

To reduce the risk of fire, use only No.26 AWG or larger telecommunication line cord.

On the Use of the RF Device

| NOTE: The information in this section applies to models with the wireless LAN module.

USA and Canada Safety Requirements and Notices

IMPORTANT NOTE: To comply with FCC RF exposure compliance requirements, the antenna used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

Radio Frequency Interference Requirements and SAR

The FCC with its action in ET Docket 93-62 has adopted a safety standard for human exposure to Radio Frequency (RF) electromagnetic energy emitted by FCC certified equipment. The wireless LAN module meets the Human Exposure limits found in OET Bulletin 65, 2001, and ANSI/IEEE C95.1, 1992. Proper operation of this radio according to the instructions found in this manual will result in exposure substantially below the FCC's recommended limits. The following safety precautions should be observed:

- Do not touch or move antenna while the unit is transmitting or receiving.
- Do not hold any component containing the radio such that the antenna is very close or touching any exposed parts of the body, especially the face or eyes, while transmitting.
- Do not operate the radio or attempt to transmit data unless the antenna is connected; if not, the radio may be damaged.

Use in specific environments:

- The use of wireless devices in hazardous locations is limited by the constraints posed by the safety directors of such environments.
- The use of wireless devices on airplanes is governed by the Federal Aviation Administration (FAA).

- The use of wireless devices in hospitals is restricted to the limits set forth by each hospital.

Antenna use:

- In order to comply with FCC RF exposure limits, low gain integrated antennas should be located at a minimum distance of 20 cm (8 inches) or more from the body of all persons.
- High-gain, wall-mount, or mast-mount antennas are designed to be professionally installed and should be located at a minimum distance of 30 cm (12 inches) or more from the body of all persons. Please contact your professional installer, VAR, or antenna manufacturer for proper installation requirements.

Explosive Device Proximity Warning

WARNING: Do not operate a portable transmitter (such as a wireless network device) near unshielded blasting caps or in an explosive environment unless the device has been modified to be qualified for such use.

Antenna Warning

WARNING: To comply with the FCC and ANSI C95.1 RF exposure limits, it is recommended that the antenna for this device be installed so as to provide a separation distance of at least 20 cm (8 inches) from all persons and that the antenna must not be co-located or operating in conjunction with any other antenna or radio transmitter. It is recommended that the user limit exposure time if the antenna is positioned closer than 20 cm (8 inches).

Use on Aircraft Caution

CAUTION: Regulations of the FCC and FAA prohibit airborne operation of radio-frequency wireless devices because their signals could interfere with critical aircraft instruments.

EMC Requirements

This device uses, generates and radiates radio frequency energy. The radio frequency energy produced by this device is well below the maximum exposure allowed by the Federal Communications Commission (FCC).

This device complies with the limits for a Class B digital device pursuant to Part 15 subpart C of the FCC Rules and Regulations. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

The FCC limits are designed to provide reasonable protection against harmful interference when the equipment is installed and used in accordance with the instruction manual and operated in a commercial environment. However, there is no guarantee that interference will not occur in a particular commercial installation, or if operated in a residential area.

If harmful interference with radio or television reception occurs when the device is turned on, the user must correct the situation at the user's own expense. The user is encouraged to try one or more of the following corrective measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

CAUTION: The Part 15 radio device operates on a non-interference basis with other devices operating at this frequency. Any changes or modification to said product not expressly approved by the manufacturer could void the user's authority to operate this device.

Canada Radio Frequency Interference Requirements

To prevent radio interference to the licensed service, this device is intended to be operated indoors and away from windows to provide maximum shielding. Equipment (or its transmit antenna) that is installed outdoors is subject to licensing.

Pour empêcher que cet appareil cause du brouillage au service faisant l'objet d'une licence, il doit être utilisé à l'intérieur et devrait être placé loin des fenêtres afin de fournir un écran de blindage maximal. Si le matériel (ou son antenne d'émission) est installé à l'extérieur, il doit faire l'objet d'une licence.

European Union CE Marking and Compliance Notices

Statements of Compliance

English

This product follows the provisions of the European Directive 1999/5/EC.

Danish

Dette produkt er i overensstemmelse med det europæiske direktiv 1999/5/EC.

Dutch

Dit product is in navolging van de bepalingen van Europees Directief 1999/5/EC.

Finnish

Tämä tuote noudattaa EU-direktiivin 1999/5/EC määräyksiä.

French

Ce produit est conforme aux exigences de la Directive Européenne 1999/5/EC.

German

Dieses Produkt entspricht den Bestimmungen der Europäischen Richtlinie 1999/5/EC.

Greek

Το προϊόν αυτό πληροί τις προβλέψεις της Ευρωπαϊκής Οδηγίας 1999/5/EC.

Icelandic

Þessi vara stendst reglugerð Evrópska Efnahags Bandalagsins númer 1999/5/EC.

Italian

Questo prodotto è conforme alla Direttiva Europea 1999/5/EC.

Norwegian

Dette produktet er i henhold til bestemmelsene i det europeiske direktivet 1999/5/EC.

Portuguese

Este produto cumpre com as normas da Diretiva Européia 1999/5/EC.

Spanish

Este producto cumple con las normas del Directivo Europeo 1999/5/EC.

Swedish

Denna produkt har tillverkats i enlighet med EG-direktiv 1999/5/EC.

Local Restrictions of 802.11a/b/g Radio Usage

CAUTION: Due to the fact that the frequencies used by 802.11a/b/g wireless LAN devices may not yet be harmonized in all countries, 802.11a/b/g products are designed for use only in specific countries or regions, and is not allowed to be operated in countries or regions other than those of designated use. As a user of these products, you are responsible for ensuring that the products are used only in the countries or regions for which they were intended and for verifying that they are configured with the correct selection of frequency and channel for the country or region of use. Any deviation from permissible settings and restrictions in the country or region of use could be an infringement of local law and may be punished as such.

The European variant is intended for use throughout the European Economic Area. However, authorization for use is further restricted in particular countries or regions within countries, as follows:

General

European standards dictate maximum radiated transmit power of 100 mW Effective Isotropic Radiated Power (EIRP) and the frequency range 2400 – 2483.5 MHz.

Belgium and the Netherlands

In Belgium and the Netherlands, the product may not be used outdoors. See the instructions next under the heading “Turning Off the Wireless LAN Radio.”

France

Departments in Which the Wireless LAN Module Can Be Used (Indoors Only)

The wireless LAN module can currently be used indoors only in the following 38 departments of mainland France. Please turn off your wireless LAN radio when operating the device in areas/places other than the 38 departments listed:

01	Ain Orientales	36	Indre	66	Pyrénées
02	Aisne	37	Indre et Loire	67	Bas Rhin
03	Allier	41	Loir et Cher	68	Haut Rhin
05	Hautes Alpes	42	Loire	70	Haute Saône
08	Ardennes	45	Loiret	71	Saône et Loire
09	Ariège	50	Manche	75	Paris
11	Aude	55	Meuse	82	Tarn et Garonne
12	Aveyron	58	Nièvre	84	Vaucluse
16	Charente	59	Nord	88	Vosges
24	Dordogne	60	Oise	89	Yonne
25	Doubs	61	Orne	90	Territoire de Belfort
26	Drôme	63	Puy du Dôme	94	Val de Marne
32	Gers	64	Pyrénées Atlantique		

Departments in Which the Wireless LAN Module's Maximum EIRP Not Shown in the Previous Table

Frequency Ranges (MHz)	Indoors	Outdoors
2400 – 2446.5	10 mW	Not permitted
2446.5 – 2483.5	100 mW	100 mW on private property with Ministry of Defense approval

Turning Off the Wireless LAN Radio

NOTE: Turning the wireless LAN radio off is not the same as disabling the wireless LAN card. It is not necessary to disable the card to meet the regulatory requirements.

While operating the computer in those French departments that do not allow use of the wireless LAN equipment, the user of the equipment must turn off the wireless LAN radio in order to comply with local regulations (see Chapter 2 for more information).